

12306-ME LARGE CHAR. LCD PANEL METER

FEATURES

200mV DC INPUT (SCALABLE 20,200,500)
 100M Ω INPUT IMPEDANCE
 SELECTABLE DECIMAL POINT
 AUTO POLARITY
 AUTO ZERO
 5VDC POWER
 EASY SNAP-IN MOUNTING



SPECIFICATIONS

MAX INPUT: 199.9 mV
INPUT IMPEDANCE: 100M Ω
SUPPLY INPUT: 5VDC
 -Power & -Input are Common
CONVERSION TYPE: DUAL SLOPE
DISPLAY: 3-1/2 DIGIT LCD
OVERRANGE: "1" SHOWN ON DISPLAY
DECIMALSELECT: 3 POS. JUMPER SELECT

MAX DISPLAY: 1999 COUNTS
ACCURACY: $\pm 0.5\%$ ($23^{\circ} \pm 5^{\circ} < 80\% \text{ RH}$)
SUPPLY CURRENT: 1mA DC
CONVERSION RATE: 2-3/SEC.
CHARACTER HT.: .8in
METER SIZE: 86MM X 42MM X 24MM


SETUP & OPERATION

- A:** Install Decimal point jumper as needed
- B:** Solder Bridge Required Range (all others Open)
SEE CHART
- C:** Connect 5VDC Power Supply
- D:** Connect source to be measured

MAX INPUT	VOLTAGE DIVIDER	DECIMAL POINT
200mV	"200mV" Bridged (Factory setting)	P3
20V	Remove "200mV" Bridge Bridge "20V"	P2
200V	Remove any other Bridge Bridge "200V"	P3
500V	Remove any other Bridge Bridge "500V"	NONE


CALIBRATION

Input a voltage from calibration source equal to 1/2 of the full scale range. Adjust R2 until reading equals that of calibration source.

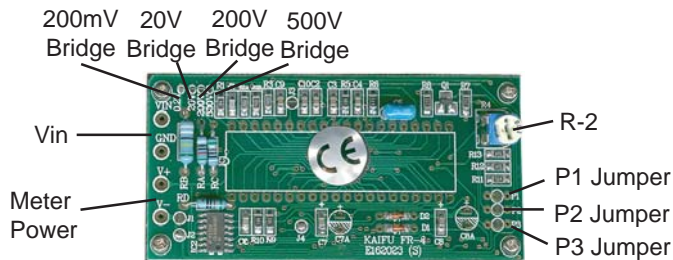

1.9.9.9
 P P P
 1 2 3

DECIMAL POINT LOCATION

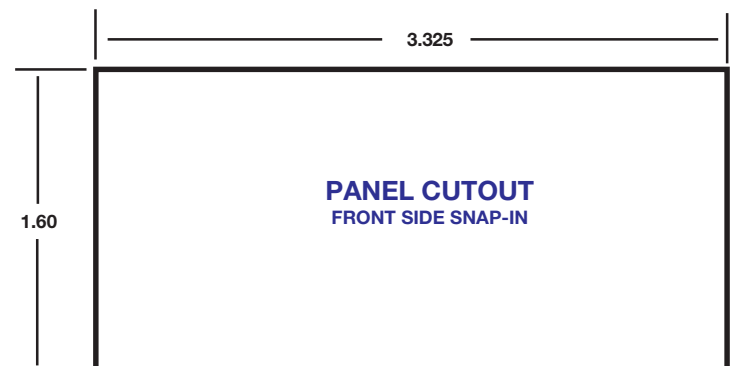

MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
 800-652-6733 FAX 561-844-8764
 WWW.MPJA.COM