

# 32409-ME

## Multifunction AC Panel Meter

**Back-lit, Snap-in LCD panel meter that measures AC Volts, Amps, Watts, Watt hours**

Ideal for submetering and monitoring. Terminal Strip for Connections & Back Cover.

Adjustable Overload function (over power alarm threshold: Backlight Flashes.)

Input Voltage: 80-260VAC

Resolution: 1V

Input Range Amps: 0-20A

Resolution: Amps: .01

Watts: 0-4500W max



Resolution: <1KW=0.1W, >1KW=1W

Energy Used: 0-9999KWh

Resolution: <10KWH= 1H

Accuracy: +-1% +-1LSD

Cutout: 84.6mm X 44.6mm **W:** 3-9/16" **H:** 2" **D:**

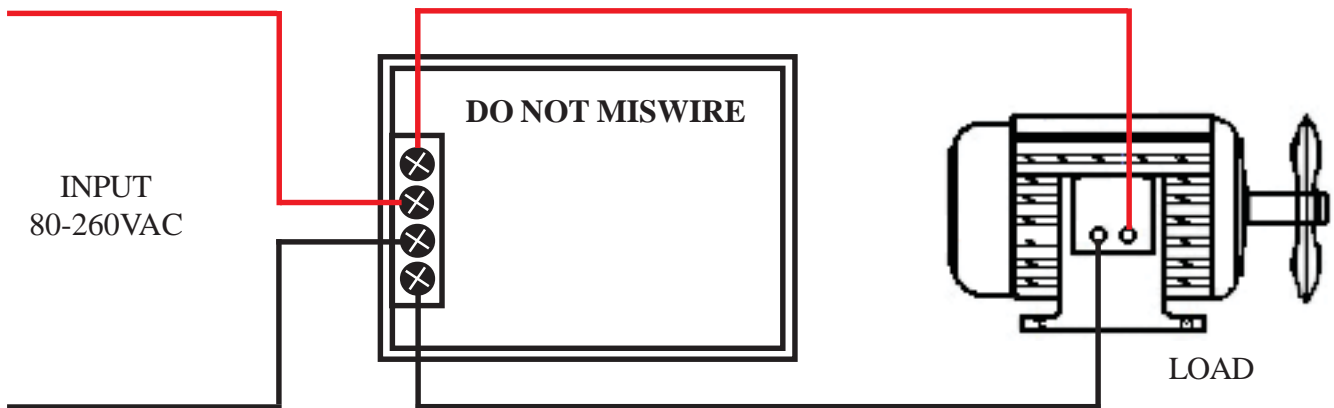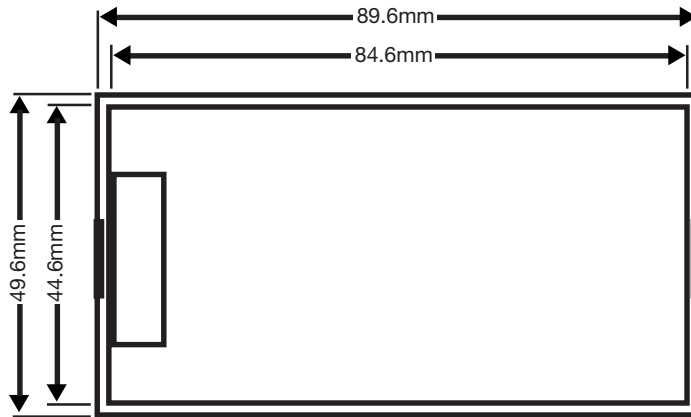

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



**MARLIN P. JONES & ASSOC., INC.**

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM

# 32409-ME

## Multifunction AC Panel Meter

### PANEL OPERATION

**NOTE:** Cumulative Watt-Hrs (ENERGY) & Backlight on/off status are retained with power off

Backlight: Short press of Button to cycle backlight ON/OFF

To Set OVERLOAD ALARM value

- 1: Press & Hold the Button Until the screen displays “**SET CLR**” then release
- 2: The POWER Display will show the present value and the last digit on right will flash  
(If no change in value is wanted go to Step 6)
- 3: Momentarily press the Button to increase the value by 1 until your value is reached
- 4: Wait 3 seconds and the next Digit to the left will flash
- 5: Repete step 3 & 4 until all digits are set
- 6: Press and hold the Button for >5seconds to store the setting and exit to normal operation

To Reset ENERGY (Watt/Hrs) cumulative value

- 1: Press & Hold the Button for >5seconds until the ENERGY screen flashes (after “SetClr” shows) then release
- 2: Momentarily press the Button to clear value and exit to normal operation

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



**MARLIN P. JONES & ASSOC., INC.**

P.O. Box 530400 Lake Park, FL 33403  
800-652-6733 FAX 561-844-8764  
WWW.MPJA.COM