


International  
**IOR** Rectifier

# 123NQ100PbF

## SCHOTTKY RECTIFIER

## 120Amp



### Major Ratings and Characteristics

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	120	A
$V_{RRM}$	100	V
$I_{FSM}$ @ $t_p = 5 \mu s$ sine	12800	A
$V_F$ @ 120Apk, $T_J = 125^\circ C$	0.73	V
$T_J$ range	-55 to 175	$^\circ C$

### Description/ Features

The 123NQ.. high current Schottky rectifier module series has been optimized for low reverse leakage at high temperature. The proprietary barrier technology allows for reliable operation up to 175  $^\circ C$  junction temperature. Typical applications are in high current switching power supplies, plating power supplies, UPS systems, converters, free-wheeling diodes, welding, and reverse battery protection.

- 175  $^\circ C$   $T_J$  operation
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- Lead-Free

### Case Styles



HALF-PAK (D-67)

## Voltage Ratings

Part number	123NQ100PbF
$V_R$ Max DC Reverse Voltage (V)	100
$V_{RM}$ Max Working Peak Reverse Voltage (V)	

## Absolute Maximum Ratings

Parameters	123NQ	Units	Conditions
$I_{F(AV)}$ Max Average Forward Current *See Fig. 5	120	A	50% duty cycle @ $T_C = 133^\circ\text{C}$ , rectangular wave form
$I_{FSM}$ Max Peak One Cycle Non-Repetitive Surge Current *See Fig. 7	12800	A	Following any rated load condition and with rated $V_{RM}$ applied
	1800		
$E_{AS}$ Non-Repetitive Avalanche Energy	15	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 5.5$ Amps, $L = 1$ mH
$I_{AR}$ Repetitive Avalanche Current	1	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ , max $V_A = 1.5 V_R$ typical

## Electrical Specifications

Parameters	123NQ	Units	Conditions
$V_{FM}$ Max Forward Voltage Drop *See Fig. 1 (1)	0.9	V	@ 120A
	1.26	V	@ 240A
	0.73	V	@ 120A
	0.9	V	@ 240A
$I_{RM}$ Max Reverse Leakage Current *See Fig. 2	3	mA	$T_J = 25^\circ\text{C}$
	40	mA	$T_J = 125^\circ\text{C}$
$C_T$ Max Junction Capacitance	2650	pF	$V_R = 5V_{DC}$ (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	7.0	nH	From top of terminal hole to mounting plane
$dv/dt$ Max Voltage Rate of Change (Rated $V_R$ )	10000	V/ $\mu\text{s}$	

(1) Pulse width 500  $\mu\text{s}$ 

## Thermal-Mechanical Specifications

Parameters	123NQ	Units	Conditions	
$T_J$ Max Junction Temperature Range	-55 to 175	$^\circ\text{C}$		
$T_{stg}$ Max Storage Temperature Range	-55 to 175	$^\circ\text{C}$		
$R_{thJC}$ Max Thermal Resistance Junction to Case	0.38	$^\circ\text{C/W}$	DC operation * See Fig. 4	
$R_{thCS}$ Typical Thermal Resistance, Case to Heatsink	0.05	$^\circ\text{C/W}$	Mounting surface, smooth and greased	
wt Approximate Weight	30 (1.06)	g (oz.)		
T Mounting Torque	Min.	3 (26.5)	Non-lubricated threads	
	Max	4 (35.4)		
	Terminal Torque	Min.		3.4 (30)
		Max		5 (44.2)
Case Style	HALF PAK Module			

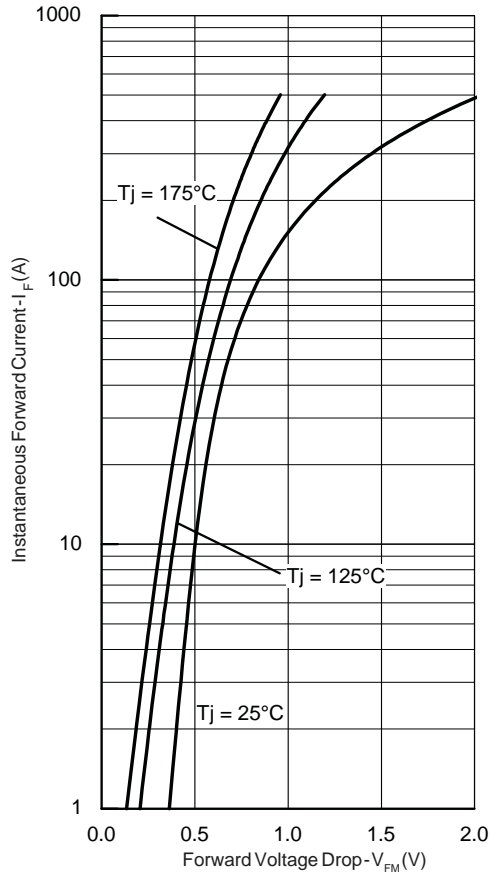


Fig. 1 - Max. Forward Voltage Drop Characteristics

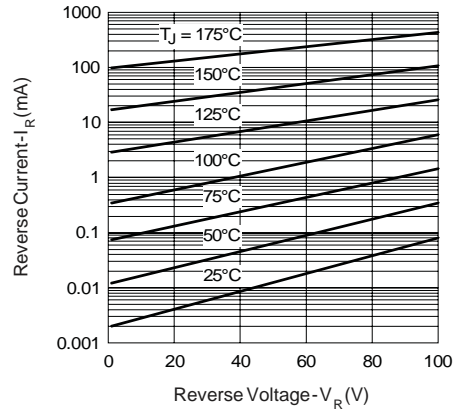


Fig. 2 - Typical Values Of Reverse Current Vs. Reverse Voltage

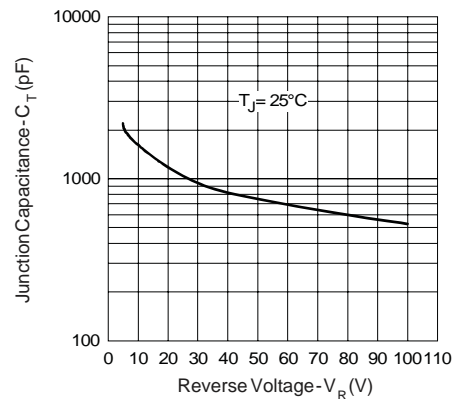


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage



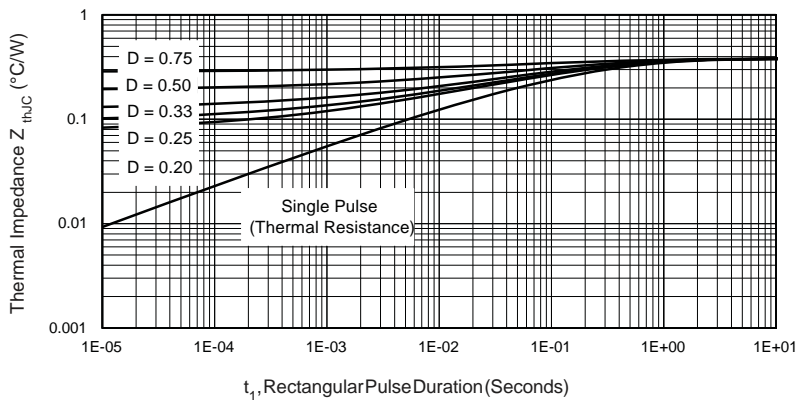



Fig. 4 - Max. Thermal Impedance  $Z_{thJC}$  Characteristics

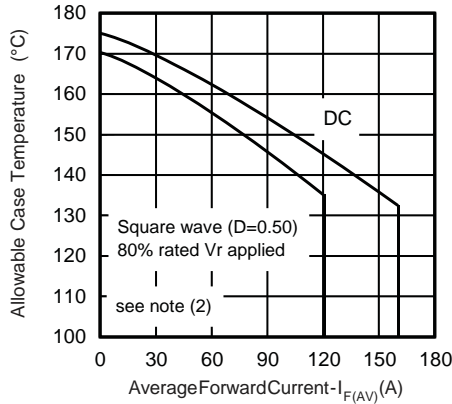


**Fig. 5 - Max. Allowable Case Temperature Vs. Average Forward Current**

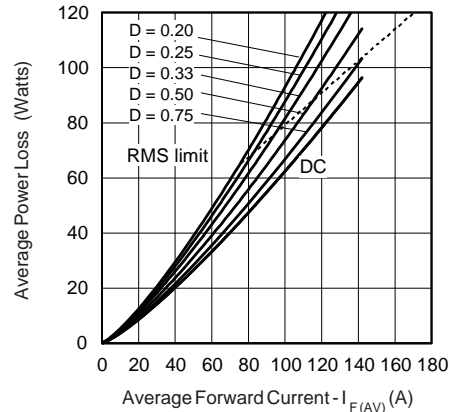

**Fig. 6 - Forward Power Loss Characteristics**

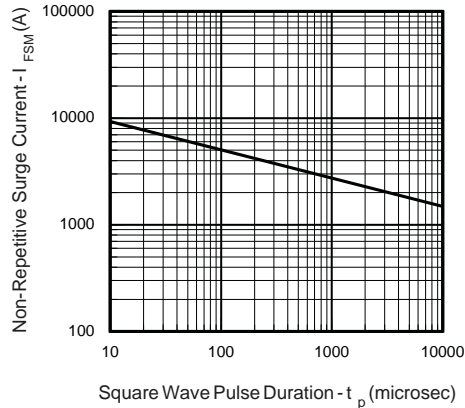


**Fig. 7 - Max. Non-Repetitive Surge Current**

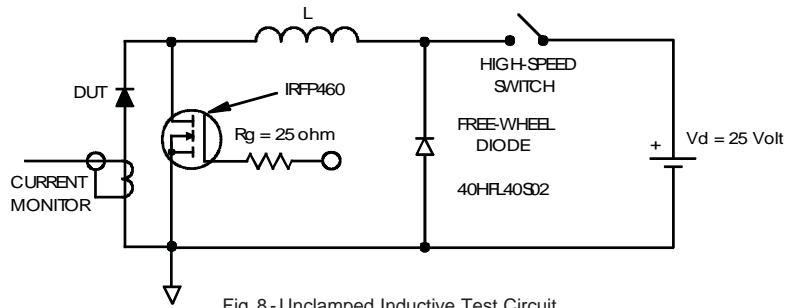

**Fig. 8 - Unclamped Inductive Test Circuit**

(2) Formula used:  $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;  
 $P_d = \text{Forward Power Loss} = I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);  
 $P_{d_{REV}} = \text{Inverse Power Loss} = V_{R1} \times I_{R1} (1 - D)$ ;  $I_{R1} @ V_{R1} = \text{rated } V_R$

Outline Table

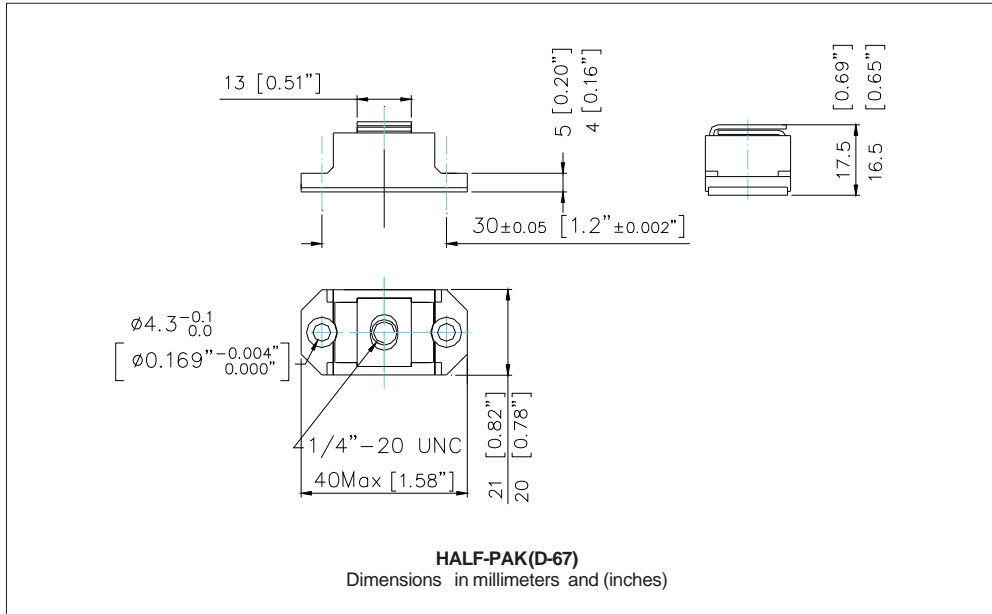

Ordering Information Table

Device Code	12	3	N	Q	100	PbF
	①	②	③	④	⑤	⑥
	<b>1</b>	-	Average Current Rating (x 10)	<b>2</b>	-	Product Silicon Identification
	<b>3</b>	-	N = Not Isolated	<b>4</b>	-	Q = Schottky Rectifier Diode
	<b>5</b>	-	Voltage Rating (100 = 100V)	<b>6</b>	-	Lead-Free

123NQ100PbF

Bulletin PD-21144 rev. A 10/06

International  
**IOR** Rectifier

Data and specifications subject to change without notice.  
This product has been designed and qualified for Industrial Level and Lead-Free.  
Qualification Standards can be found on IR's Web site.

International  
**IOR** Rectifier

**IR WORLD HEADQUARTERS:** 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105  
TAC Fax: (310) 252-7309  
10/06



## Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.