

32764-MP

Fahrenheit Digital Thermostat

Multi purpose, compact digital thermostat/controller with isolated relay output and 3 digit 0.28" Red LED display.

Features: programmable set Points, Cool or Heat control, Hysteresis & Delay Time

Power: 12VDC

Current: <=35mA Relay open/<=65mA Relay energized

Temperature Range: -58° to +230° Fahrenheit

Refresh rate: 0.5sec.

Resolution: 0.1° <99.9°F

1.0deg. for above 100° F

Accuracy: Measurement : 0.1° F

Control: 0.1° F

Relay: SPST-NO 20A/14VDC; 20A/125VAC


Status LED: ON to indicate Relay Closed/OFF to indicate Relay Open

Sensor: Waterproof 10KΩ NTC B3950 resistive probe (>15" leads)

Ambient Board Range: +15 to +140°F: 20-85% humidity

Terminal Strip for Power & Relay contacts.

L: 1-7/8in. **W:** 1-9/16in. **H:** 5/8in. **WT:** .04

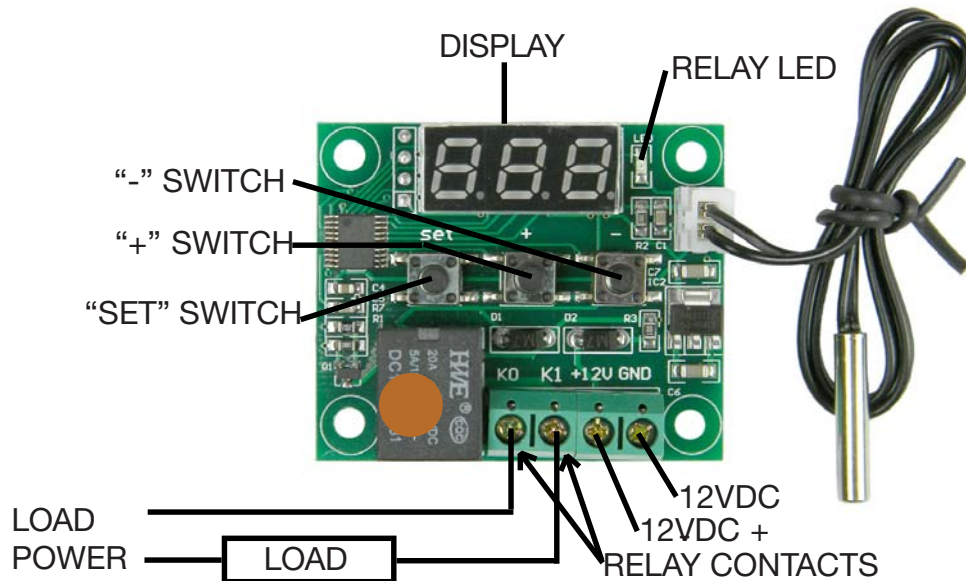

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

All rights are retained by the respective Owners/Author(s)
Information is Subject to Change Without Notice



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM

32764-MP

"F" Digital Thermostat

Operation:

- 1: Place Controller in desired location along with the probe
- 2: Connect Load to Controller Relay Contacts (Be sure Load power is off)
- 3: Connect 12VDC Power Supply to Controller (Display will show ambient temperature)
- 4: Press SET button momentarily and the display will flash
Press the + or - buttons to set the desired temperature
Press SET to confirm setting & Exit

Setting Parameters:

- 1: Press & hold SET for >5seconds to enter Main Menu
 - 1.1: Press the + or - to sequence through the Setup P0-P6
 - 1.1.1: Short press of SET to show present setting
 - 1.1.2: Press + or - to adjust the settings
 - 1.1.3: Short press of SET to store & return to Parameter set mode (P0,P1 etc.)
 - 1.1.4: P6 Mode: Only functions in P0=H Mode P2 MUST BE SET BELOW P6 TEMP
Enter P6 mode, Press Press + or - to toggle to "ON",
Press "SET" again to enter adjustment mode, Adjust Alarm Temp. with + or - buttons
Hold SET for >5sec. or wait >10seconds to return to normal operation
 - 1.2: Repeat 1.1 steps to set other Parameters
 - 1.3: When finished Hold SET for >5sec. or wait >10seconds to return to normal operation

Parameter Chart:

Mode	Function	Range	Default
P0	Heat/Cool	C/H	C
P1	Hystresis	1-60°F	2°F
P2	Upper Temp.	Lower +5-230°	230°F
P3	Lower Temp.	-58° to Upper-5°	-58°F
P4	Correction	-19.9° to +19.9°	0
P5	ON Delay	0-10min.	0
P6	HighAlarm	ON: -58°to230°	OFF/230°
To return Factory Default Value: Press & Hold +-when powering up			

Sets Relay Function On Cool or On Heat
Sets the the span between ON/OFF
Limits the Max. temperature that can be entered in SET Mode
Limits the Min. temperature that can be entered in SET Mode
Set Offset due to special circumstances
Sets the Delay time after Set temp. is reached before relay is On
In P0=H; sets the Over Temp. limit. forces relay Off and Fast
Flash of Temp.
Returns to Normal operation below set Temp.

LED Display Mode

- Normal: Ambient Temp
- Flashing: Setting
- Shows "LLL" Sensor is Open or disconnected
- Shows "HHH" Temperature is out of range
- "Fast Flash" Over Temp Alarm: Shows Over Temperature value

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM