

34667-MI

Countdown Timer

Countdown timer module that you set a time and press the Run/Stop button and the relay closes until the time expires.

Display: 3 Digit Red LED D/P flashes 1/sec

Power: 12VDC

Range: 1-999 minutes

Adjustment: 1min increment/ Button push

Holding a set Button for >5sec causes rapid auto change in time

Relay: SPST-NO

Contacts: 10A@ 250/125VAC/30VDC

Relay Activated LED

Terminal Strips for Power & Relay Contact

L: 2-1/16" W: 1-5/8" H: 3/4" WT: .04

NOTES:


Time-out resets time to "000" (Not Auto Recycle)

Time can not be changed while counting but can be modified when stopped

Stopping the Count will result in timer restarting at the last minute displayed (Seconds not retained)

Power failure causes the timer to stop (Does Not Restart)
Pressing "RUN" will restart at the last Set Time (Not where it left off)

Power failure after a time-out causes Timer to Set time to "001"

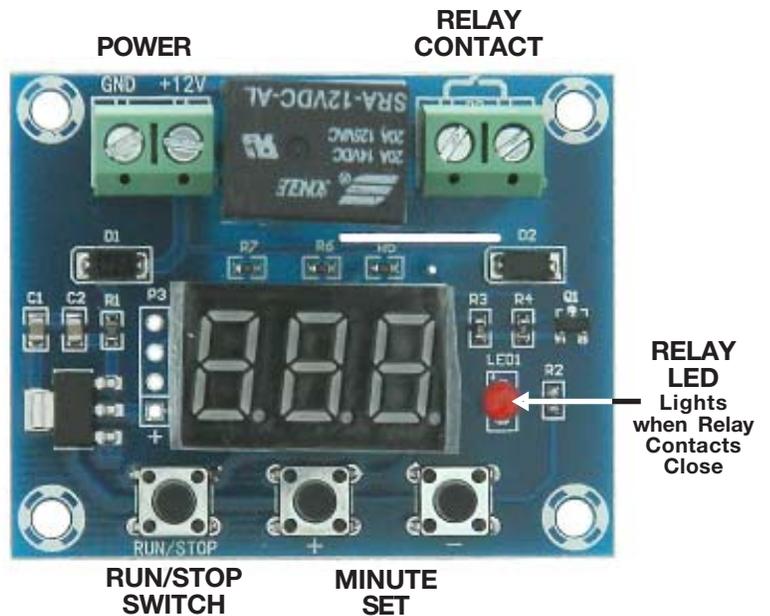

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM