

# 37659-MI

## 3 Digit Incrementing Electronic Counter

Increases by 1 count each time the "KEY" terminals are momentarily shorted together.

Remembers count when powered off.

**P/N:** QF-MC03

**Power:** 6.5V-16VDC

**Display:** 3 Digit Red LED 0.36"

**Max Count:** 999 (Rolls Over to 000)

Temperature Range:-40°~85°C

Humidity Range:0%~95%RH

5in. Power Leads

Solder Holes for "Trigger" (KEY) input


**L:** 43mm (1-3/4") **W:** 23mm (15/16")

**H:** 11mm (7/16") **WT:** .03




**NOTE:** "KEY" Input requires a Momentary Contact Closer.

Module is Trailing Edge Triggered. Count takes place when the "KEY" contacts are Opened

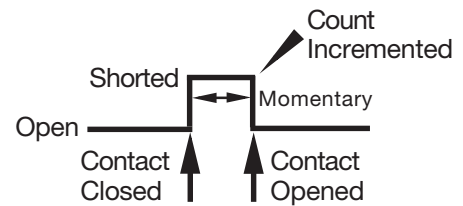

### RESET:

To Reset back to "000": With power ON;  
Keep the "KEY" Switch contacts Closed for >5 seconds, Then release (Open), The count will then clear to "000".

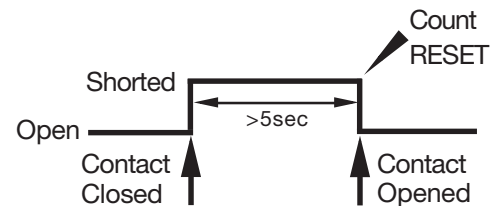

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice  
All rights are retained by the respective Owners/Author(s)



**MARLIN P. JONES & ASSOC., INC.**

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM