

15978-PM LCD PANEL METER

FEATURES

- 200mV DC INPUT (SCALABLE 20,200,500)
- 100M Ω INPUT IMPEDANCE
- SELECTABLE DECIMAL POINT
- AUTO POLARITY
- AUTO ZERO
- 9VDC POWER
- SNAP-IN MOUNTING



SPECIFICATIONS

MAX INPUT:	+/-199.9 mV	MAX DISPLAY:	1999 COUNTS
INPUT IMPEDANCE:	100M Ω	ACCURACY:	+/-0.5% (23° +/- 5° < 80% RH)
SUPPLY INPUT:	9VDC	SUPPLY CURRENT:	1mADC
	-Power & -Input are Independent	CONVERSION RATE:	2-3/SEC.
CONVERSION TYPE:	DUAL SLOPE	CHARACTER HT.:	.5in
DISPLAY:	3-1/2 DIGIT LCD	METER SIZE:	68MM X 41MM X 19MM
OVERRANGE:	"1" SHOWN ON DISPLAY		
DECIMALSELECT:	3 POS. JUMPER SELECT		


SETUP & OPERATION

- A: Install Decimal point jumper as needed
- B: Remove RB Jumper and install Scaling resistors RA/RB (Not Supplied) as required SEE CHART
- Scaling Resistors: 1/2W 0.5% Metal film
- C: Connect 9VDC Power Supply
- D: Connect source to be measured

MAX INPUT	VOLTAGE DIVIDER	DECIMAL POINT
200mV	None Leave RB Jumper	P3
20V	Remove RB Jumper Install RA: 100K Ohm Install RB: 9.9M Ohm	P2
200V	Remove RB Jumper Install RA: 10K Ohm Install RB: 9.99M Ohm	P3
500V	Remove RB Jumper Install RA: 1K Ohm Install RB: 9.999M Ohm	None


CALIBRATION

Input a voltage from calibration source equal to 1/2 of the full scale range. Adjust R4 until reading equals that of calibration source.

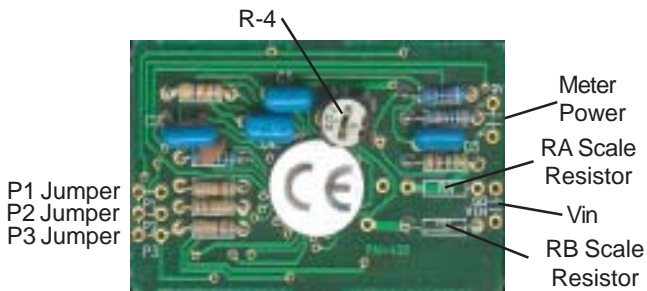

1.9.9.9
P P P
1 2 3

DECIMAL POINT LOCATION

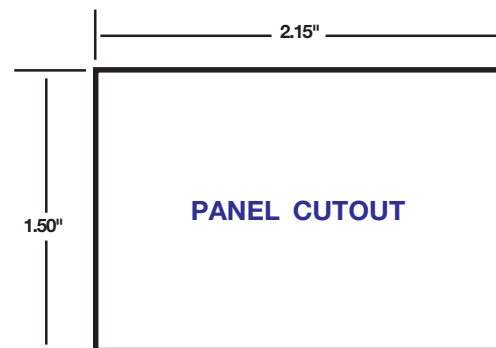

MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM