

18927-PS

28V Supply

MFG: NAO **P/N:** PJSP-300-1028

Input: 100-240 VAC 50/60Hz

Output: 28VDC @ 10.8A (Output rated with 34CFM air flow)

Power Factor corrected, Open frame switching supply with current limit & Temperature protection.

1% line/load reg. Molex connectors for input & Output (Pins & Housings Supplied),

ULusa/canada/CE listed.

L: 7-3/4" **W:** 5-1/4" **H:** 1-3/4" **WT:** 2.8


AC CONNECTOR

PIN: 1 **LINE 100-240VAC**
PIN: 2 **NEUTRAL**
PIN: 3 **EARTH GROUND**




MAIN DC CONNECTOR

PIN: 1,2,4,5,7,8 **+28VDC**
PIN: 3,6,9 **-28VDC**



TOP View

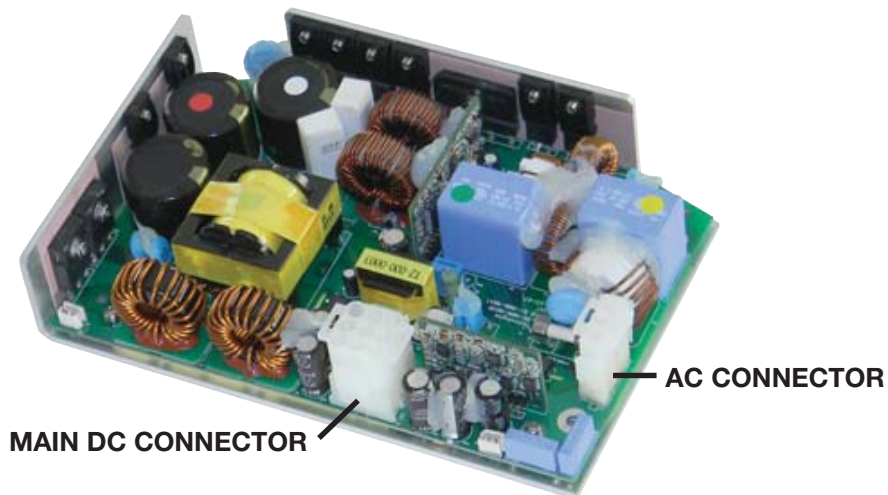

MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM