

32928-ME

Panel Meter, LED 0-50A AC with CT

Snap-in, 3 digit Red LED Panel Ammeter and Current Transformer.

METER

Input: 0-5A (50A with CT)

Meter Power: 220VAC

Resolution: .1A

Accuracy: $\pm 1\%$ ± 2 LSD

Refresh Rate: ~ 5 /Sec.

Character Height: 0.56in.

Terminal Strip for Power & Input

Cutout: 68mm X 38mm

CURRENT TRANSFORMER

Primary Turns: 3

Rated Voltage: 500VAC

Accuracy Class: .5

Frequency: 50Hz (OK for 60Hz Operation)

Center Hole: 1-1/4in. Dia.

Buss Bar Slot: $\sim 1-1/2$ in. X 3/8in. centered horizontally in Hole

Secondary Connection: Screw

Meter W: 2-15/16" **H:** 1-11/6"

D: 2-1/8"

WT: .15


C/T H: 4-1/2"

L: 4-1/4"

D: 1-5/8"

WT: 1.4

SHIP WT: 1.7

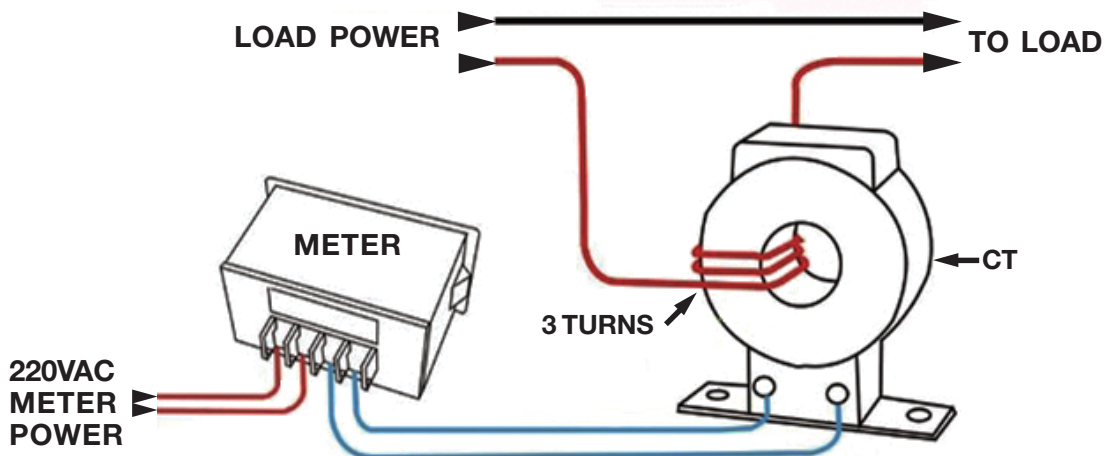

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM