

33370-PS

Adjustable Constant Current Charger/Supply 3A

NOTE: Depending on In/Out Voltage difference & Load Current Unit can get Hot

Non Isolated, adjustable DC/DC Buck (Step Down) constant current, Driver, Charger.

Adjustable compliance Output Voltage and adjustable Constant Current output for charging batteries or driving LEDs

Input Voltage: 5-38VDC

Output Voltage: 1.5-36VDC

Min. Input/Output Voltage Differential: <1V.

Input Voltage must be higher than required output voltage


Rated Current: 3A (Fan needed above 3A)

Max Current: 5A


Current Adj.: sets the available charging/driving current

L: 2-1/2" W: 1-1/16" H: 5/8" WT: .04

During a charging cycle: It is normal to have multiple LEDs Lighted

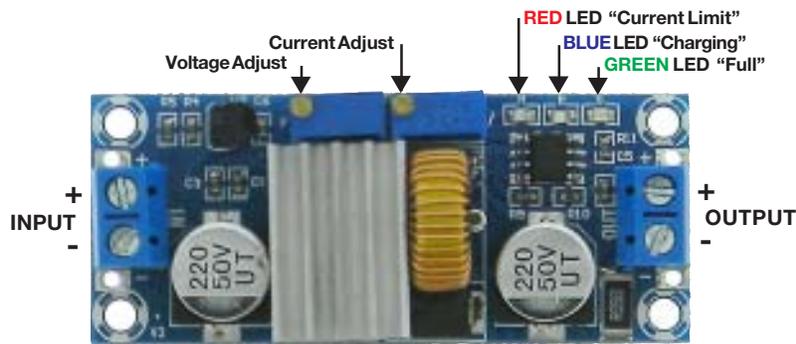

NOTE: Depending on Input to Output Voltage difference & Load Current Heatsink will get Hot

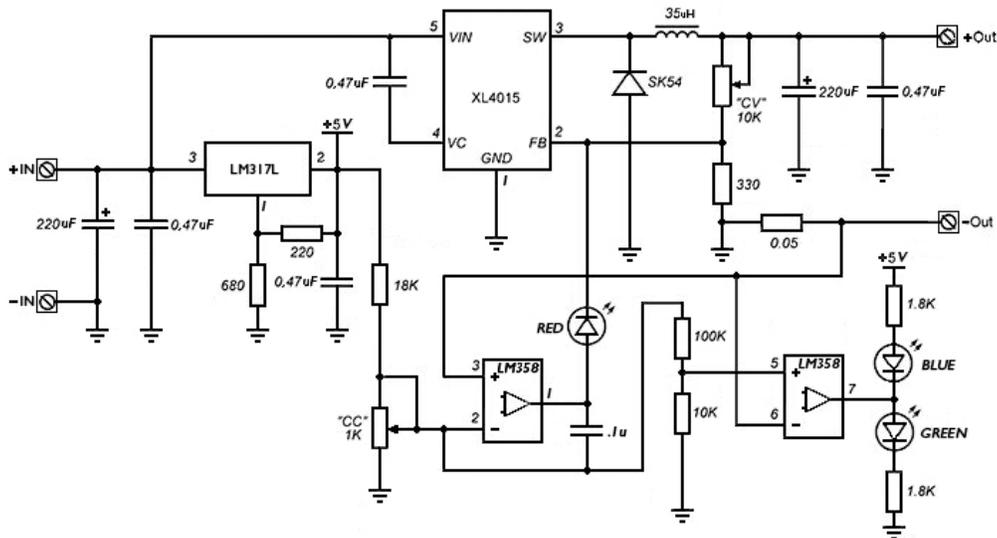

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM