

33407-ME

DIN AC Volt & Amp Meter

LED panel meter contains both a 3 digit AC Volt Meter and Amp. Meter.

Character Height: 0.5in.

Voltage: 80-300VAC Resolution: 1V

Current: 0-99.9A Resolution: Amps: .1


Accuracy: +-1% +2LSD

Sample Rate: ~ 2/sec.

H: 3.15" W: 2.52" D: 2.13" WT: .3

Connect the Voltage to be measured to Terminals 1 & 2 at the lower end of meter. These are for voltage sensing and meter power!

Using Wire of sufficient gage from Source, feed through Hole in case (Direction does not matter) and connect to Load. Connect other Lead from Load back to power source

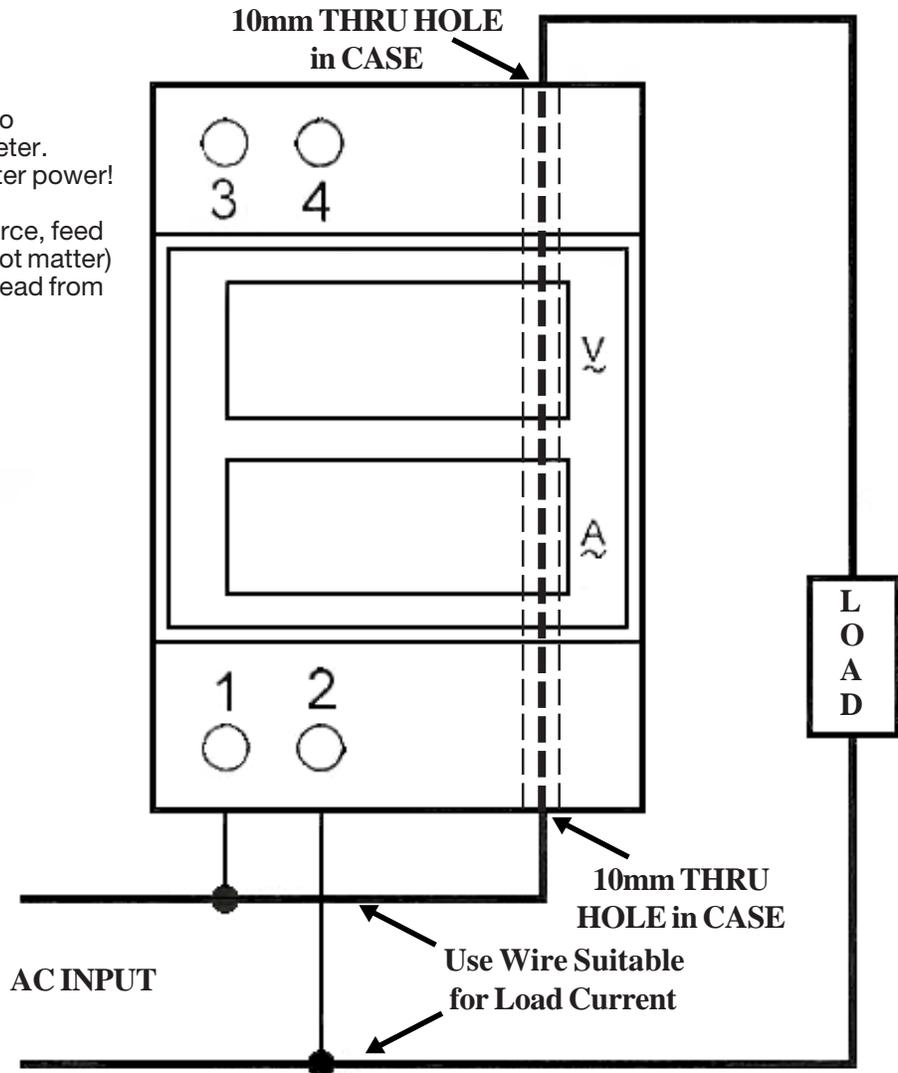

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM