


NOTES

- Vcc1: +5V from Microcontroller
 - Vcc2: +5V from External Source
 - Gnd2: Common to External supplies.
 - Vc: External Motor Supply +4.5-36V
- For Single External Supply
Operation under 5.5V Only
Jumper Vc to Vcc2 on Header**

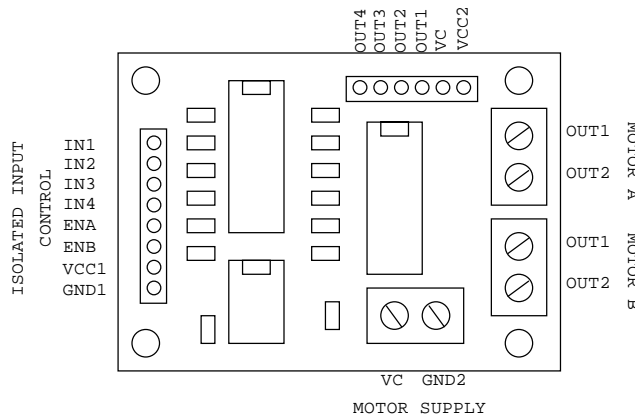

TOP VIEW

WWW.MPJA.COM		
Title L293 OPTO ISOLATED MOT DRIVE 31597		
Size Custom	Document Number MARLIN P. JONES & ASSOC	Rev
Date: Sunday, August 03, 2014	Sheet 1	of 1