


NOTES

- Vcc1: +5V from Microcontroller
- Vcc2: +5V from External Source
- Gnd2: Common to External supplies.
- Vc: External Motor Supply +4.5-36V
- For Single External Supply
Operation under 5.5V Only
Jumper Vc to Vcc2 on Header**

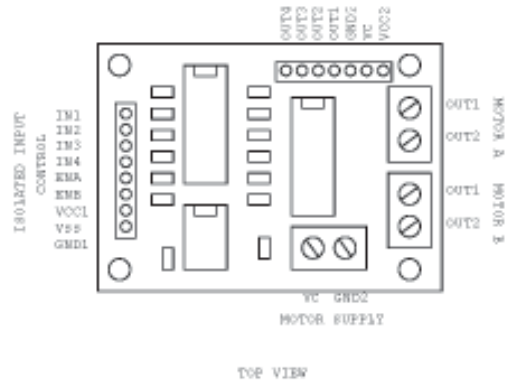

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk. All rights are retained by the respective Owners/Author(s)

www.mpja.com		
Title Dual Channel Isolated Motor Driver, L293D		
Size	Document Number 31597 MP	Rev.
Date	Sheet	