


# 31876-FN

## ◀ AA17251 SERIES



### External Dimensions

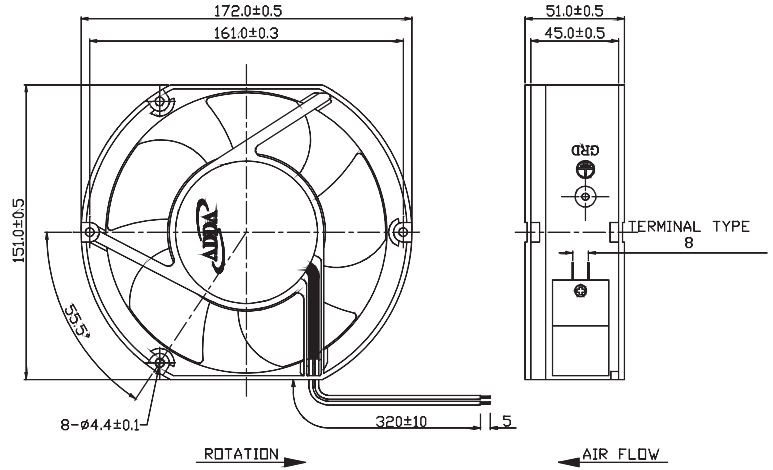

Frame: Aluminum Alloy  
 Impeller: Plastic (UL:94V-0)  
 Motor Structure: Shaded Pole Induction Motor.  
 Motor Protection: Thermal Protect.  
 Lead wire: UL1015AWG18  
 Wire Type: -AT Terminal/ -AW Wires  
 OPERATING TEMP\*: -10°C~70°C  
 \*: -10°C~60°C for fans with sleeve/ball combination bearings.


### Specifications(Nominal)

Frame size (mm)	Model No.	Bearing System Type	Volt. (VAC)	Freq. (Hz)	Current (A)	Power (W)	Rated Speed (rpm)	Maximum AirFlow (CMM)	Maximum AirFlow (CFM)	Maximum Pressure (InAq)	Maximum Pressure (mmAq)	*Noise Level (dB/A)	Weight (g)
172x150X51	AA1751HB-AT	◎	115	50/60	0.52/0.47	40.90/36.70	2500/2800	5.546/5.943	196.0/210.0	0.425/0.266	10.795/6.756	52.3/53.0	930
	AA1752HB-AT	◎	230	50/60	0.26/0.22	41.90/37.60							


Bearing type: ◎=Ball ※=Sleeve ○=1B1S ●=Hypro bearing

\*Noise is measured at the distance of one (1) meter from the axis of intake.

50Hz

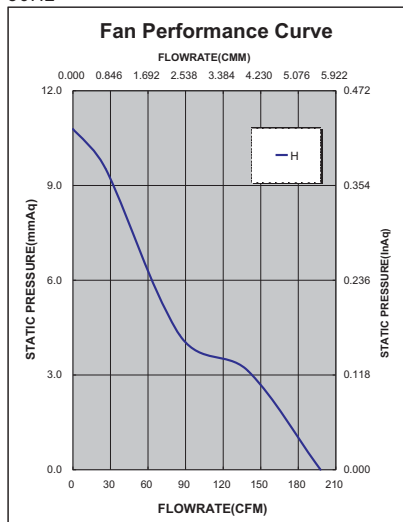

60Hz

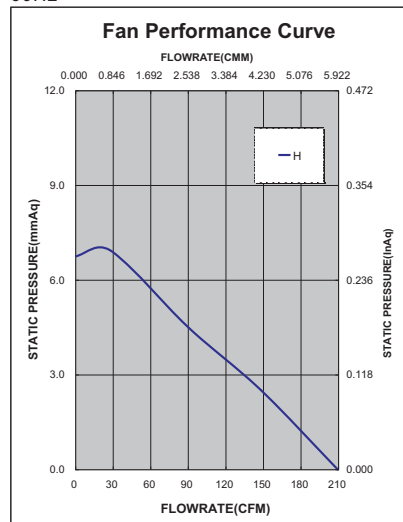

\*Safety approvals

✓	✓		✓	✓