

35906-TE

5MHz Handheld Mini Scope

Full function, handheld mini oscilloscope with high resolution 2.4 inch 320x240 LCD screen.

3hr. run time on charged battery. One button AUTO displays the waveform complicated adjustments. Waveform file manager (Save Wave) supports thumbnail browsing, detail view, delete. Day mode (White Background) and Night mode (Black Background)

Measures up to 11 parameters: VPP, Vmax, Vmin, Vavg, Vrms, Frequency, Duty+, Duty-, Time+, Time-, Time

Analog bandwidth: 5MHz

ADC precision: 8 bits

Maximum real time sampling rate: 20MS/s

Vertical sensitivity: 50 mV/div - 200 V/div (>40V requires 10X probe)

Input: BNC Jack

Input impedance: 1Mohm

Horizontal time base range: 50S/div ~ 250nS/div

Trigger: Single, Normal or Automatic

Trigger Edge: Selectable Rising or Falling

Coupling: AC or DC

Maximum Input Voltage: 40V (1X probe), 800 V (10X probe) AC, DC or DC+AC

Memory: 16M storage space, 500 waveform pictures max

Power supply: 1200 mAh lithium battery

H: 4-3/4" O/A W: 2-7/8" T: 1" WT: .6




WARNING:

IF MEASURED VOLTAGE IS GREATER THAN 40V AC, DC or DC+AC.

YOU MUST USE A 10X PROBE OR THE SCOPE WILL BE DAMAGED.

THE 1X/10X SELECTION ON THE SCOPE DOES NOT AFFECT THE INPUT, ONLY THE SCALE OF THE SCOPE

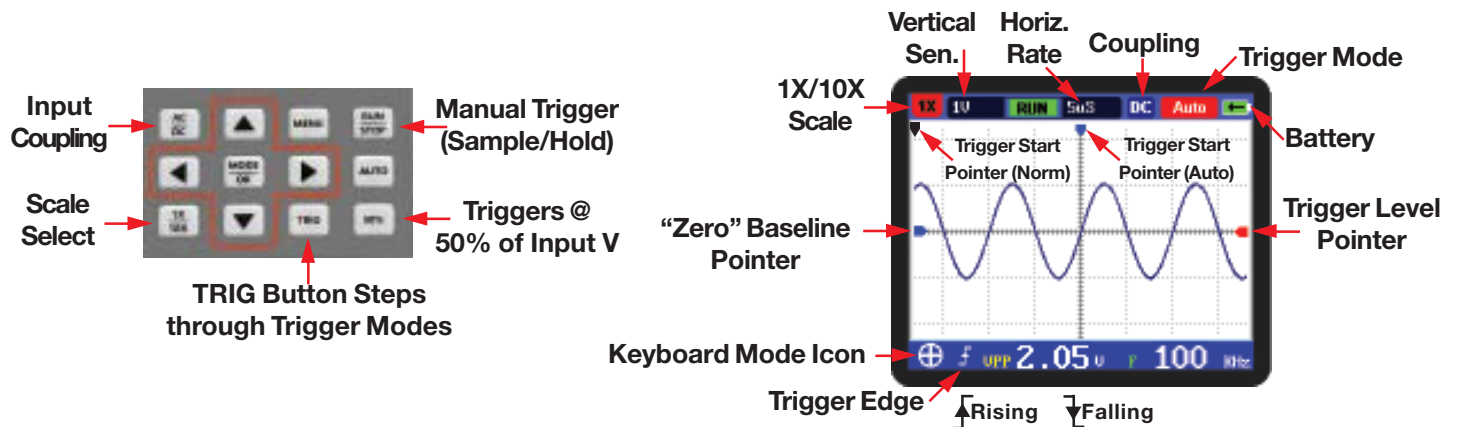

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM


35906-TE

5MHz Handheld Mini Scope

Pressing "MODE" Changes Keyboard Function

Keyboard Mode Icon

Icon	Button	Function
⊕	▲▼ ◀▶	All Trigger Modes in Run Only Buttons adjust Vertical Sensitivity Buttons adjust Horizontal Rate
⬆	▲▼ ◀▶	Auto Trigger Mode in Run & Stop (Only Shows in AUTO Mode) Buttons adjust Base Line Buttons adjust pre-Trigger
↕	▲▼ ◀▶	Single & Normal Trigger Modes in Run & Stop Buttons adjust Base Line Buttons Not Functional
⬆ T	▲▼ ◀▶	Single Trigger Mode in Stop (Run until set Level) Buttons adjust Trigger Voltage Level Buttons select Rising or Falling Edge Trigger
	▲▼ ◀▶	Normal Trigger Mode in Run Buttons adjust Trigger Voltage Level Buttons select Rising or Falling Edge Trigger
	▲▼ ◀▶	Normal Trigger Mode in Stop Buttons Not Functional Buttons select Rising or Falling Edge Trigger
	▲▼ ◀▶	Auto Trigger Mode in Run Buttons Not Functional Buttons select Rising or Falling Edge Trigger
	▲▼ ◀▶	Auto Trigger Mode in Stop Buttons adjust Trigger Voltage Level Buttons select Rising or Falling Edge Trigger

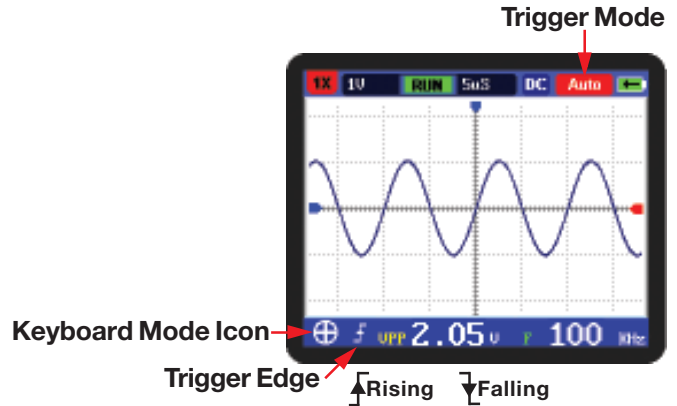

SETUP OPTIONS

Pressing "MENU" brings up Setup Screen

Pressing ▲ or ▼ Scrolls through menu


Pressing "MODE/OK" or ◀ Shows present sub menu selection.
NOTICE the "Dot" and "Highlighted" choice.

Pressing ▲ or ▼ Alternates "Highlighted" Sub selection NOT the "Dot"

Pressing "Mode/OK" moves the "Dot" to the Highlighted choice.
(Stores Selection)

Pressing ▶ Closes sub menu & returns to Setup Screen

Press "MENU" to close Setup Screen

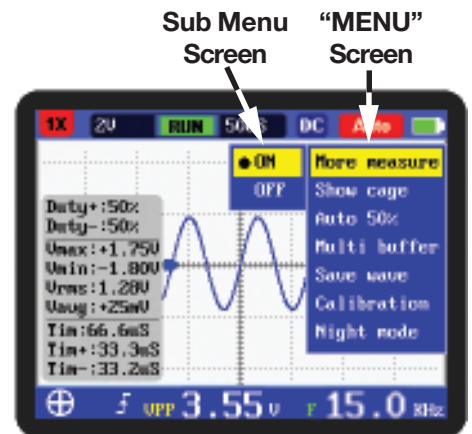

MARLIN P. JONES & ASSOC., INC.


P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM

35906-TE


5MHz Handheld Mini Scope

SCREENS BASICS


Turning ON
"More Measure"
Opens Detail
Measurement
Screen →

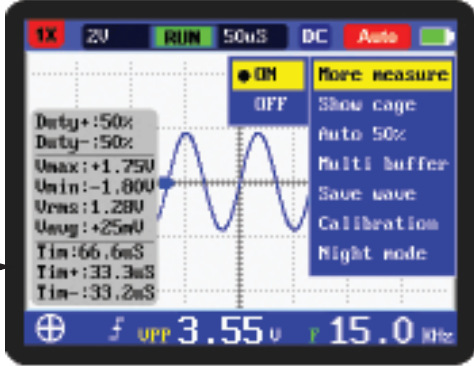


Turning OFF
"Show Cage"
Removes Grid
From Screen

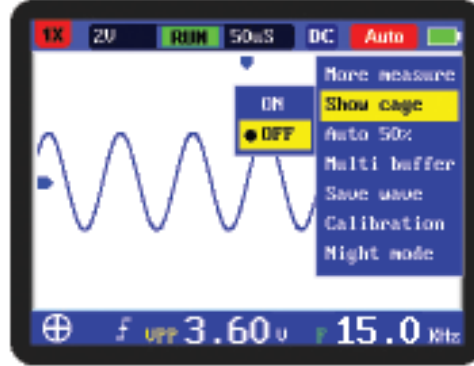


Turning ON
"Auto 50%"
Sets the Trigger
at
50% of peak

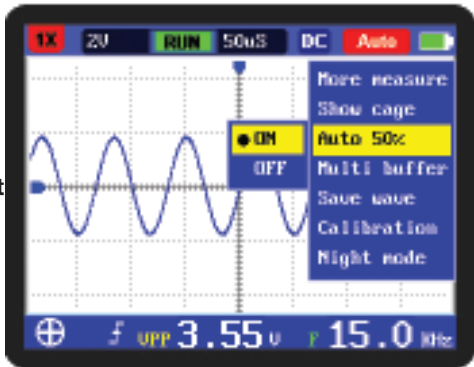


"Multi Buffer"
Waveform
Persistence
Adjust for Fast or
Slow Waveforms

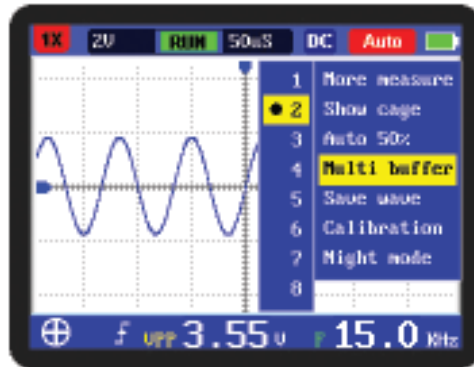

"Save Wave"
Select "Save" to
store waveform
Press "Mode/OK"
to save
"Save" changes
to "Complete"
Select "View"
to review Stored
Waveform(s)

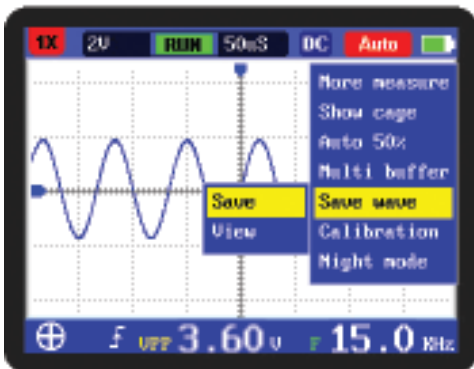

"Calibration"
Disconnect
Probe and
Charger
Press "MODE/OK"

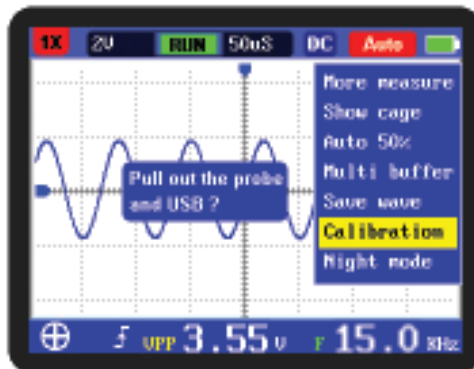




MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM

35906-TE

5MHz Handheld Mini Scope

SAVING/VIEWING WAVEFORM(s)

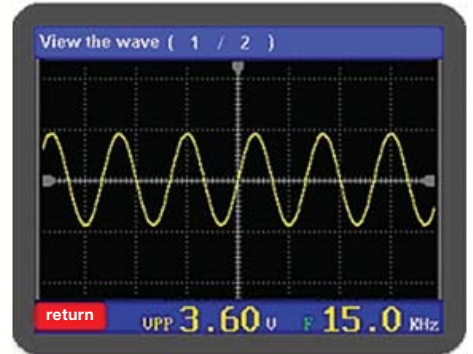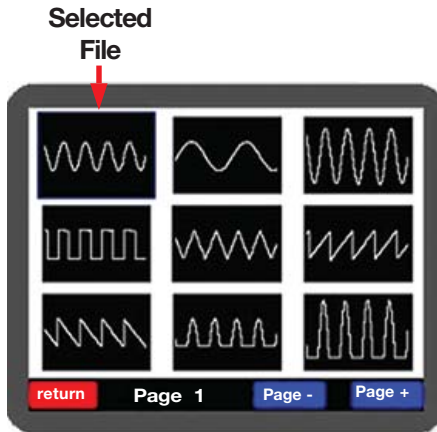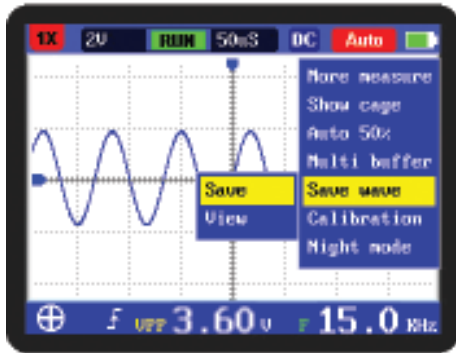

SAVED FILES

SELECTED FILE

SAVE

- Press "MENU" to bring up Setup Screen
- Press ▼ to Scroll to "Save Wave"
- Press "MODE/OK" or ◀ to display "Save" and "View" selection ("Save" is Highlighted)
- Press "Mode/OK", "Save" will change to "Complete"
- Press ▶ To return to main Setup Screen
- Press "Menu" to return to normal operation

VIEW

- Press "MENU" to bring up Setup Screen
- Press ▼ to Scroll to "Save Wave"
- Press "MODE/OK" or ◀ to display "Save" and "View" Sub screen ("Save" is Highlighted)
- Press ▼ to select "View"
- Press "MODE/OK"
- Screen will display saved waveforms (9/Page)
- Use ▲ ▼ ▶ ◀ to Select desired waveform to review (Selected will Slightly Larger)
- To change pages (>9 stored waveforms)
- Press "RUN/STOP" to Increase page#, Press "MENU" to decrease Page #.

NOTE

- After selecting waveform to view, Press "MODE/OK" to view waveform.
- Pressing "MODE/OK" again will display the more "Detail Measurement" Screen
- Press "AC/DC" to step back through screens
- NOTE that Bottom Left of LCD shows "Return". When "Return" disappears you are back to normal operation.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM