

# 33373-RL

## Recycle Relay Module

SPST adjustable recycle (Astable) timer/relay with isolated contacts. 2 digit LED display for observing & setting times. LED status indicator (on active). ON and OFF times adjustable in 1 sec. increments from 1-99 seconds. Turns ON when Power is applied, stays ON until ON time setting is reached then turns OFF. Stays OFF until OFF time setting is reached then turns back ON. Repeats until power is removed. Terminal Strip for Connections.

### SETTING

#### Note: Do Not Connect The Load at This Time

A: In Normal Operation the Display will show the stored settings for both ON & OFF as the unit cycles

B: If no adjustments are made for 3 seconds the the unit will continue previous operation & Display will return to alternating ON/OFF readings

C: After adjustments are made, wait 3 seconds and changes will begin & Display will display the new settings

#### 1: To set ON Time

A: Apply power, the the relay will activate & the Display will show the present ON setting

B: Press the upper Push Button Switch (S-1 +)

C: The Display will Flash the present setting

D: Use the + button to increase ON time or the - button to decrease the ON time

#### 2: To set OFF Time


A: Apply power, the the relay will activate & the Display will show the present ON setting

B: Press the Lower Push Button Switch (S-2 -)

The Display will Flash the present OFF setting

Use the + button to increase OFF time or the - button to decrease the OFF time

#### 3: Remove Power and Attach Load

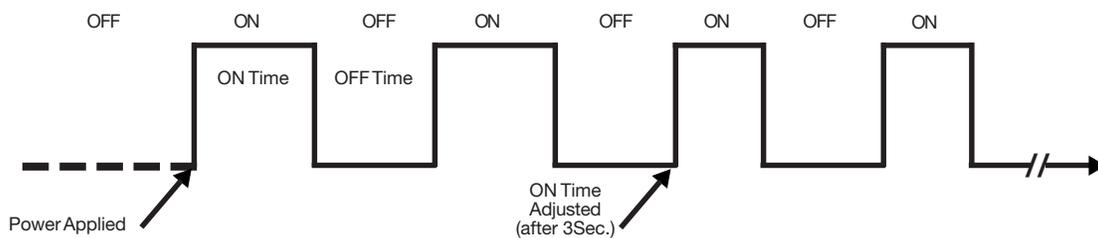

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



**MARLIN P. JONES & ASSOC., INC.**

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM