PRODUCT SPECIFICATION

RGB SMD Flexible Sealed Strip

Features:

The application of soft & flexible PCB makes the strip possible to be bent into any shape as per users' needs. The viewing angle as wide as 120° and adjustable length by cutting off or connecting every three LED's enable it to be more suitable for the applications of signs, advertisings and backlights.

Applications:

Channel Letters

Lighting source for shop windows

Indoor Decoration Lighting

Advertising Signs

Replacement for Neon




CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY



Photo




Drawing (1 meter)

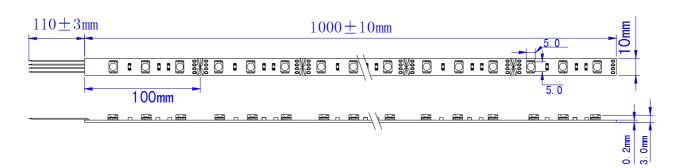

Notes:

- 1. All dimensions are millimeters.
- 2. Tolerance is ±0.2mm unless otherwise specified.
- 3. Specifications are subject to change without notice.
- 4. Dimension: L1000*W10*H3.0mm.without prior notice.
- 5. Can be cut or connected every three LEDs.

■ Circuit Diagram(a single group)

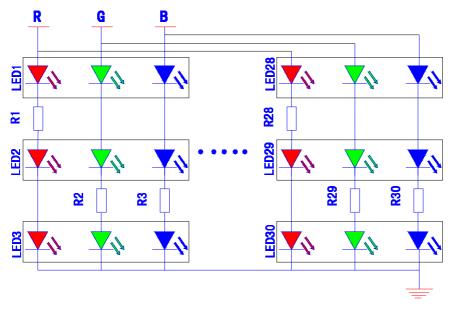

■Rating Electrical/Optical Characteristics(1 meter)

Item	Red	Blue	Green	White			
Operation Voltage(V	DC12	DC12	DC12	DC12			
Power Dissipation(V	2.4	2.4	2.4	14.4			
Input Current(mA)	200	200	200	600			
Wavelength(nm)	625-635	465-475	515-525	/			
Single LED Luminous Intensity(MCD)	780	400	1500	2680			
Luminous Flux(Im)	70	33	150	253			
Angle(°)	120						
Operation Temperature(℃)	-20~60						
single LED Operating	20	20	20	60			
LED Quantity(pcs)	30						
Dimension:(mm)	L1000*W10*H3mm						
Life Time(hrs)	50000						
net weight:(g)	40						
Approval	CE(NO:E8N 08 03 57489 002)						

■ Rating Electrical/Optical Characteristics(5 meter)

Item	Red	Blue	Green	White
Power Dissipation	12W	12W	12W	36W
Total Length	5m±0.5mm	5m±0.5mm	5m±0.5mm	5m±0.5mm.
Input Current(mA)	1000	1000	1000	3000
Weight	200g	200g	200g	200g



Package(5 meters) Reel

The backsides of all products will stick '3M' branded double-sided sticker with 10mm width.



How to use:

- 1. Please use this product with 12V DC.
- 2. Please complete the ESD-prevention before using.
- 3. The flexible LED strips should be neither bent into right-angles nor folded.
- 4. For this product, every three LEDs on the same strip can be cut off and use separately (namely, every 100mm works as a group). Please refer to the 'Outline' for the details.
- 5. The calculating way that how many this product a power supply can upload is: the current(A) that the power supply can offer/the current distributed to each single group*total group of this product
- 6. The strip quantity of each sting that directly connected to the power supply should not exceed 30 PCS; otherwise, the brightness of the strip at the end of the string will be dimmed because of the voltage reduction. Although a loop circuit can avoid reduction happening, one string should not connect too many strips.
- 7. The wire with gray line is anode, while the red s green blue syellow white is cathode, If polarities connected in a wrong way, the strip will not be lit, but will not be damaged either. What only needs to do is changing the polarity connection.
- 8. When installing the strips in the plastic letters or characters, please try to use 3 or 4 branch wires and when doing the connection try to make the strips in a letter or character or box form a loop circuit or several loop circuits by using red and black wire to connect the strips at the end of the strokes together according to their polarities.
- 9. This product is water-proof.
- 10.When installing the strip, the double-sided adhesive tape or carpenter's glue is required to make the clip slot of the strip firmly stuck together. When using the double-sided adhesive tape, proper glass glue must be spread to avoid the strip falling off after long-time exposed in the sunlight.
- 11. The strip quantity of each sting that directly connected to the power supply should not exceed 30 pcs; otherwise, the brightness of the strip at the end of the string will be dimmed because of the voltage reduction. Although a loop circuit can avoid reduction happening, one string should not connect too many strips.
- 12.No push, squeeze or press on the components of the strip for fear damaging the components to affect the lighting effects.

