

33982-RL



40A 220VDC

DC Control Solid State Relay

DC Controlled, Opto-Isolated,
Solid State Relay with Input Active LED

SPST-NO DC Only

LOAD CURRENT: 40A
LOAD VOLTAGE: 5-220VDC
CONTROL Voltage: 3-32VDC <25mA
ON Voltage Drop: <1.5VDC
OFF Leakage: <5mA
Switching Time: <10mS
Dielectric Strength: 2500VAC
Temperature Range: -30 to +70 C
Screw terminals. CE Listed.
L: 2-7/16" W: 1-3/4" H: 1" WT: .3

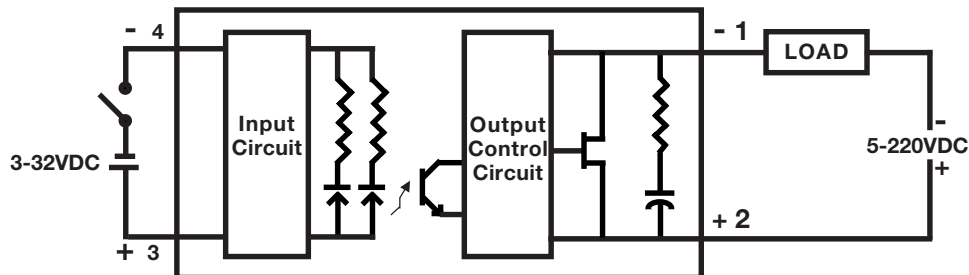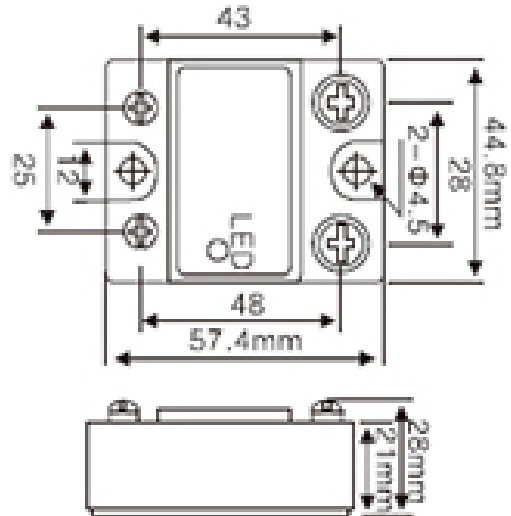

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM