

33984-85-86-RL



10A/25/40A 480VAC

AC Control Solid State Relay

AC Controlled, Opto-Isolated, "0" voltage turn-on,
Solid State Relay with Input Active LED

SPST-NO AC Only

LOAD CURRENT: 10/25/40A
 LOAD VOLTAGE: 24-480VAC
 CONTROL Voltage: 80-280VAC <5mA @ 110VAC
 ON Voltage Drop: <1.6VAC
 OFF Leakage: <5mA
 Switching Time: <20mS
 Dielectric Strength: 2500VAC
 Temperature Range: -30 to +70 C
 Screw terminals. CE Listed.
L: 2-7/16" W: 1-3/4" H: 1" WT: .3

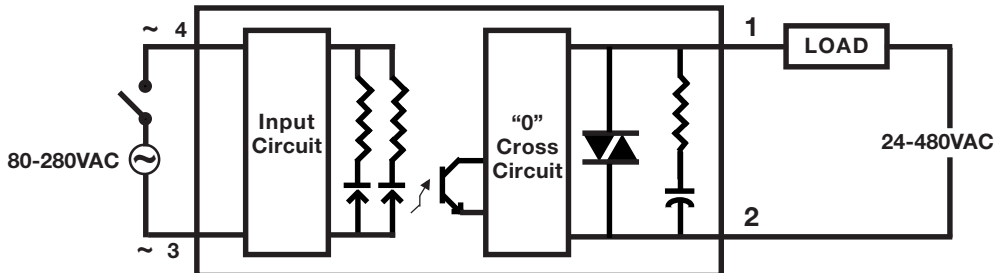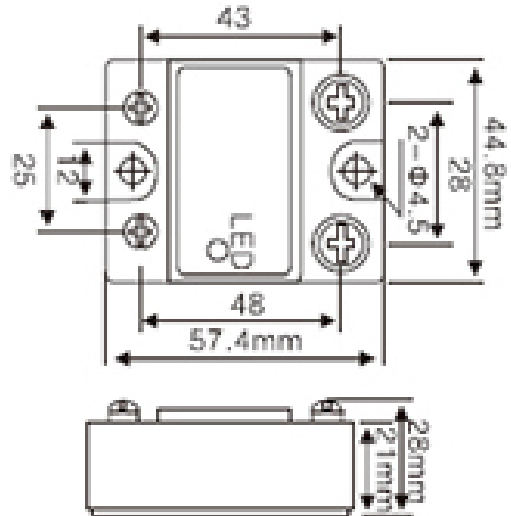

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
 800-652-6733 FAX 561-844-8764
 WWW.MPJA.COM