



33989-RL

10A/480VAC Current Controlled Solid State Relay

Current Controlled, Opto-Isolated, "0" voltage turn-on,
Solid State Relay with Input Active LED

SPST-NO AC Only

LOAD CURRENT: 10A
 LOAD VOLTAGE: 90-480VAC
 CONTROL CURRENT: 4-20mA
 ON Voltage Drop: <1.6VAC
 OFF Leakage: <2mA
 Switching Time: <10mS
 Dielectric Strength: 2500VAC
 Temperature Range: -30 to +70 C
 Screw terminals. CE Listed.
L: 2-7/16" W: 1-3/4" H: 1" WT: .3

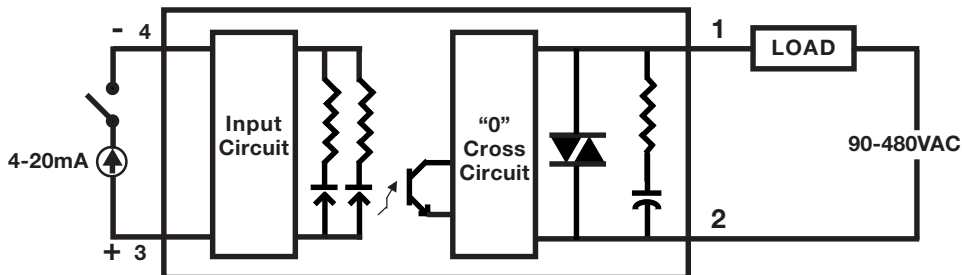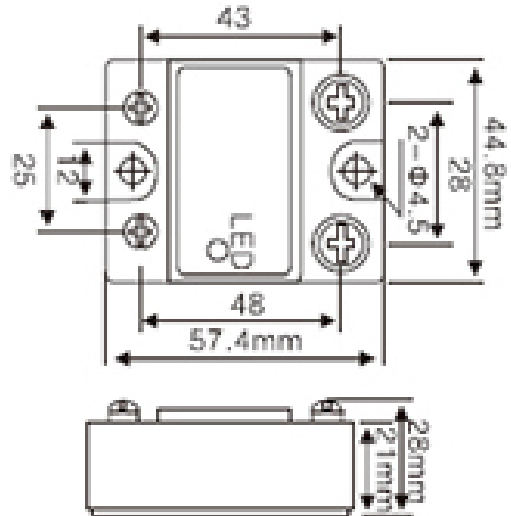

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
 800-652-6733 FAX 561-844-8764
 WWW.MPJA.COM