

34169-TT

CAT-5/6 Feedthrough Bulkhead

Water resistant bulkhead RJ-45 feedthrough (coupling) connector. Body mounts in a 20mm dia. hole. Install the sealing gland body on your RJ45 cable, plug into the bulkhead jack(s), slide gland down and thread onto the bulkhead. To finish the install, Tighten the sealing nut to compress rubber seal around cable.

Max Wall Thickness: 8.8mm

L: 4" (O/A)


DIA: 1-1/8"

WT: .1

ASSEMBLY



NOTE: FOR RJ-45 PLUGS WITHOUT STRAIN RELIEF

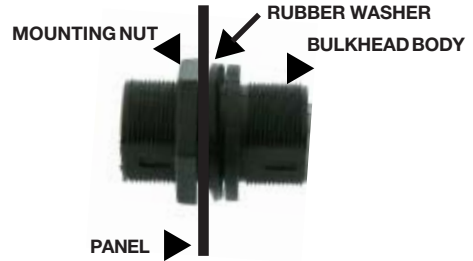

1: Mount Bulkhead Body with the Washer on the Outside, through Your Panel & Tighten Mounting Nut



2: Place the Compression Nut then the Grommet Followed by the Bulkhead Shell over the cable



3: Assemble Bulkhead Shell, Grommet & Compression Nut.

DO NOT FULLY TIGHTEN COMPRESSION NUT



4: Insert RJ-45 Plug into Bulkhead Body until it Latches into socket



**5: Screw Assembled Bulkhead Shell On to Bulkhead Body Until Seats
Tighten the Compression Nut**

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM