

# 34836-HD

## LASER Photo Switch M12 NPN Open 12-24V

2 part Beam type opto interrupter with NPN Open Collector transistor for detecting objects breaking the beam. Output low upon detection.

Metal Case

Visible Red 880nm Beam for easy alignment

Power: 6-36VDC @ ~ 300mA (Load Dependent)

Output: Current Sink 300mA max

Range: 0-10m

Temp. Range: -25 to +60 "C"


Operational LEDs on Back.

1m Leads

Body Thread: M12x1

Includes Mounting Brackets

**DIA:** 12mm Body **L:** 70mm **WT:** .3

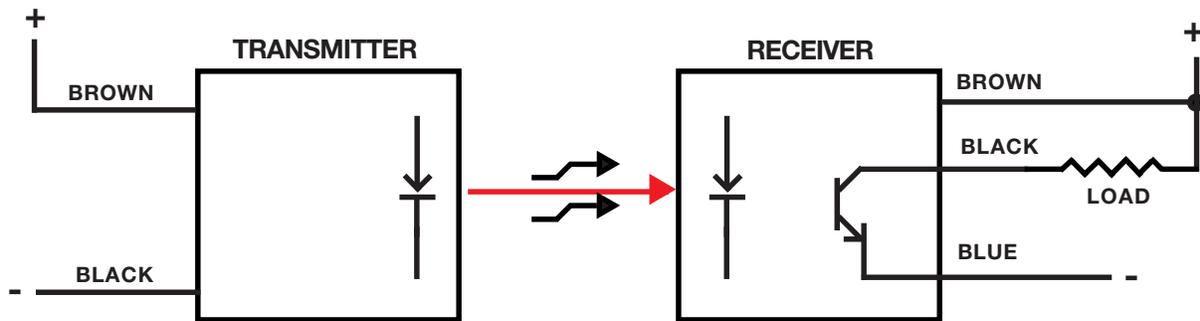

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice  
All rights are retained by the respective Owners/Author(s)



**MARLIN P. JONES & ASSOC., INC.**

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM