

35036-PL

CAT-5/6 Feedthrough Bulkhead

IP-67 rated CAT 5e chassis mount Feedthru connector.

Includes Cable Backshell & Sealing Gland.

REQUIRES ASSEMBLY

1.5A Max, -40C to +80C temp. range.

CE listed, RoHS Compliant.

Feedthru: RJ45 Females on both sides. Back mounts through panel with a sealing washer.

Threaded sealing cap.

Mtg. Hole: 20.3mm

Feedthrough: L: 1-5/8" O/A **DIA:** 1-7/64" O/A


Cable Shell: L: 1-3/8" **DIA:** 15/16" O/A

WT: .06


ASSEMBLY




NOTE: NOT FOR PREMADE CABLES FOR RJ-45 PLUGS WITHOUT STRAIN RELIEF

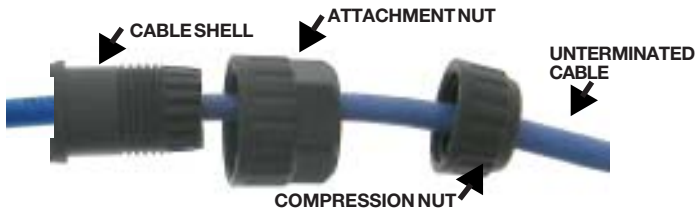

2: Place the Compression Nut then the Attachment Nut Followed by the Cable Shell over the cable Attach RJ-45 Plug to Cable

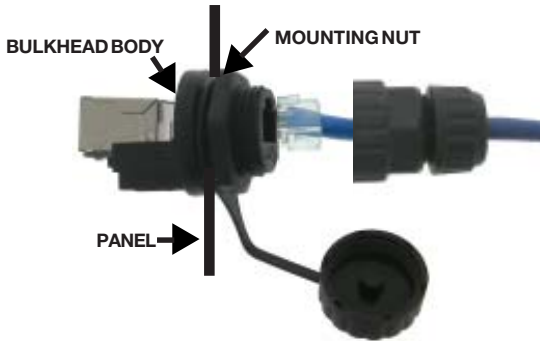

4: Insert RJ-45 Plug into Bulkhead Body until it Latches into socket

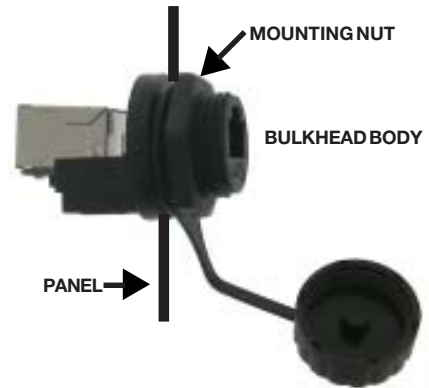

1: Mount Bulkhead Body with the Washer on the Outside, through Your Panel & Tighten Mounting Nut



3: Assemble the Shell, Attachment & Compression Nut. DO NOT FULLY TIGHTEN COMPRESSION NUT



5: Screw Assembled Bulkhead Shell On to Bulkhead Body Until Seats Tighten the Compression Nut Allow clearance to loosen Attachment Nut

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM