


# 36006-MI

## Vacancy Detecting Wall Switch

### Connection Diagram

VCSSVW15

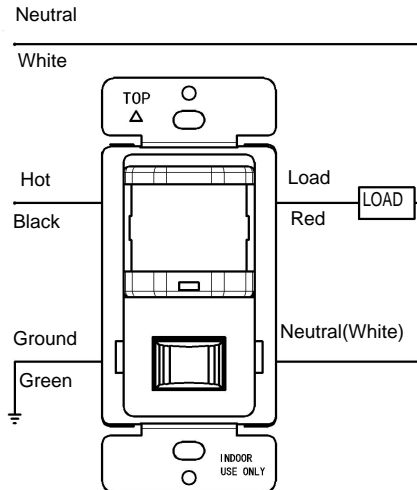

Passive Infrared Vacancy Sensor w/ manual override switch, 500W/VA120V,

Single Pole, Auto Off

Color: Ivory

Load Rating 1: Incandescent lamp: 500 Watt

Load Rating 2: Fluorescent lamp: 500 VA

Load Rating 3: Motor Load: 1/8HP

Voltage: 120 V AC

Poles: Single

Hertz: 60 Hz

Time Delay: 15 Seconds to 30 Minutes

Mounting Type: Wall

Sensor Technology: Passive Infrared

Light Level: 30 Lux-Daylight

Operation Temperature: 32°F to 131°F (0°C to 55°C)

Coverage 1: 150, 450 square feet

Certifications: cULus

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice  
All rights are retained by the respective Owners/Author(s)



**MARLIN P. JONES & ASSOC., INC.**

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM