


36480-RL

Single Channel IR Remote Control - 5V

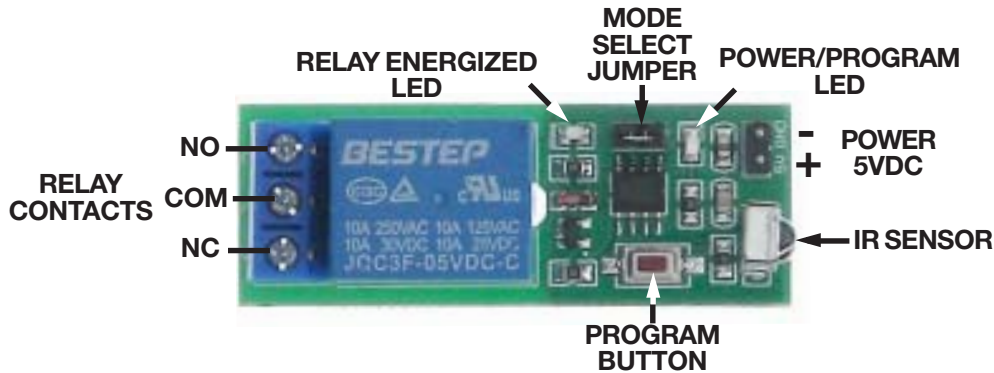

RELAY DEFAULTS TO NORMAL STATE OF COMMON CONNECTED TO NC CONTACT WHEN POWER REMOVED

Single channel remote control SPDT Relay with isolated contacts.

Range: Line of Sight >10ft

Board: 5V Power

~40mA standby

~140mA Relay energized

Remote: CR2025 3V Coin Cell

Selectable Mode:

Momentary (Jumper ON)

or Alternate Action Push ON/Push OFF (Jumper OFF)

NOTE: You must program which remote button is used (Not Both)

Press Push Button on Board & Hold until POWER/PROGRAM LED

Flashes. Release and then press a button on remote.

Relay: SPDT

Contacts: 10A @ 125/250VAC/30VDC

Terminal Strip for Relay Contacts

0.1" Pitch Header for Power

Board:

L: 2-1/8" **W:** 3/4" **H:** 3/4"

Remote:

L: 3-3/8" **W:** 1-1/2" **T:** 5/16"

WT: .06

IR
EMITTER



CHOOSE 1
OR THE
OTHER BUT
NOT BOTH
ONLY 1 CAN
BE USED

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM