

37640-37644-PL

Mating 5.08mm Connectors with Screw Lock & Plate

Mating screw terminal wire/cable Plug, Socket and Panel
Mount Socket Plate.

Screw Clamp wire terminal connections.

Pitch: 5.08mm C/C.

Wire: 12-28AWG

Rated Voltage: 300V/Current: 15A

Temperature: -40° to 105°C

Panel Cutout

2 Pin: 22mm x13mm

3 Pin: 27mm x13mm

4 Pin: 32mm x13mm

5 Pin: 37.1mm x13mm

6 Pin: 42mm x13mm

Cutout Mounting Holes

26.8mm C/C

32mm C/C

37mm C/C

42.1mm C/C

47.2mm C/C

PANEL ASSEMBLY



A: Front Mount Plate into your Panel or Box

B: Connect Wiring to Jack

C: Snap Jack into back of Plate (Once Done-Hard to extract)

D: Connect wiring to Plug.

E: Insert into Panel Jack and Tighten Locking Screws

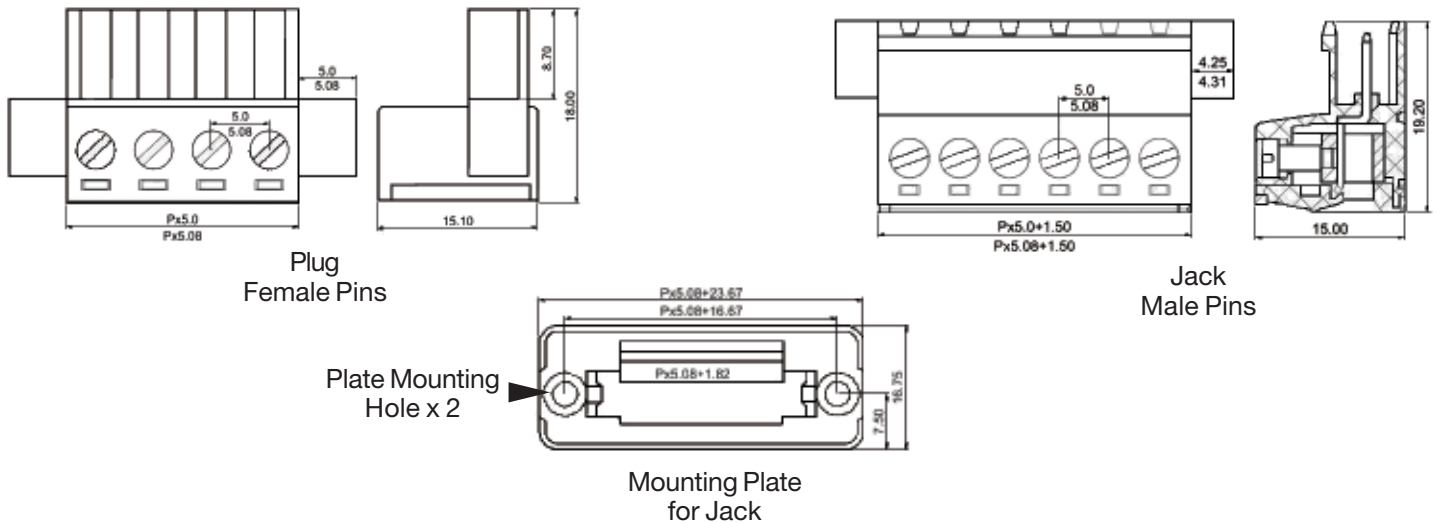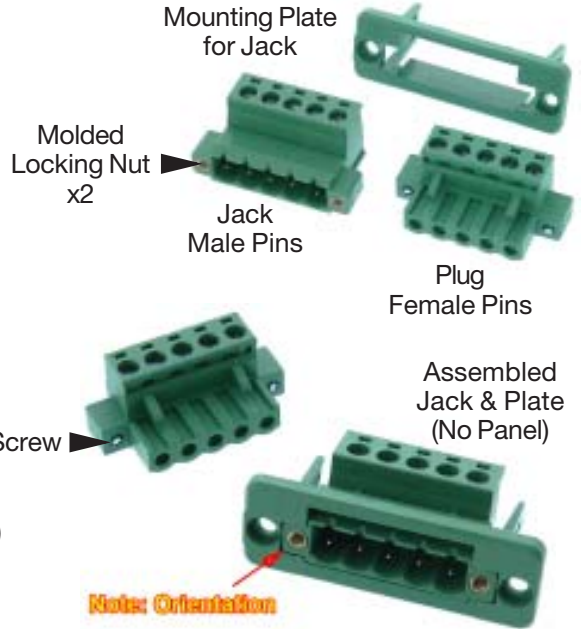

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM