


37677-RL

Delay on Break Timing Relay
~2 Seconds to ~10 Minutes

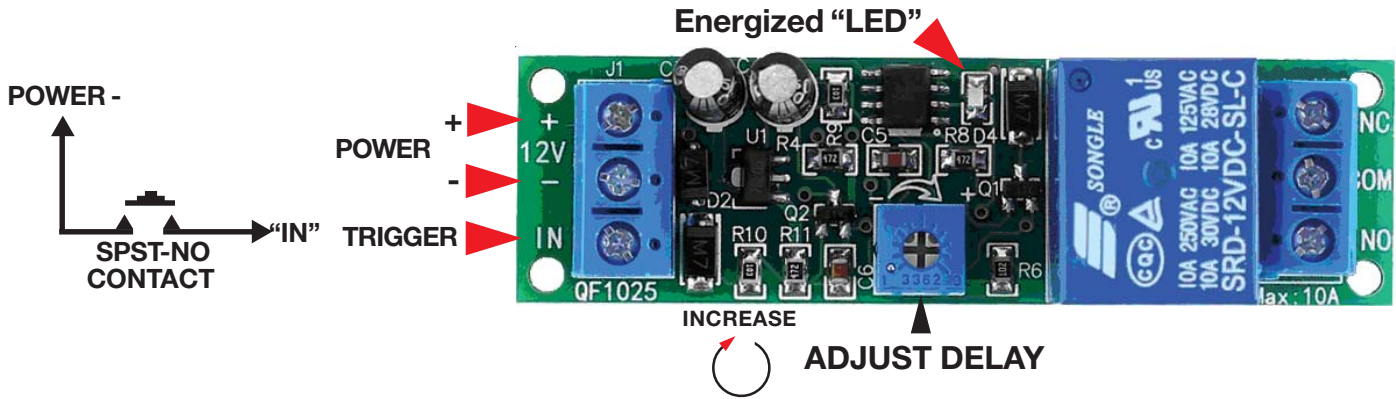

Adjustable General use relay module provides approximately 5sec -10min. Delay on OFF (Break). Trigger Input turns Relay ON & starts Turn OFF delay Time, after delay, Relay turns OFF

NOTE: Trigger is locked out for entire timing cycle.

Trigger: Low level signal (Ground) (<20mS).

P/N: QF1025-12V

Power: 12DC @ ~50mA energized

Timing Range: ~2sec to ~10min.

NOTE: Control is a single Turn!

Precise Adjustment is tricky

Relay: SPDT 10A @125/250VAC/28VDC

LED lights when contacts close.


Terminal strips in & Out.

Operating Temperature: -25°C ~ 85°C

Humidity: 5% to 95% RH

L: 2-3/4" (70mm) **W:** 3/4" (20mm)

H: 3/4" (20mm) **WT:** .04

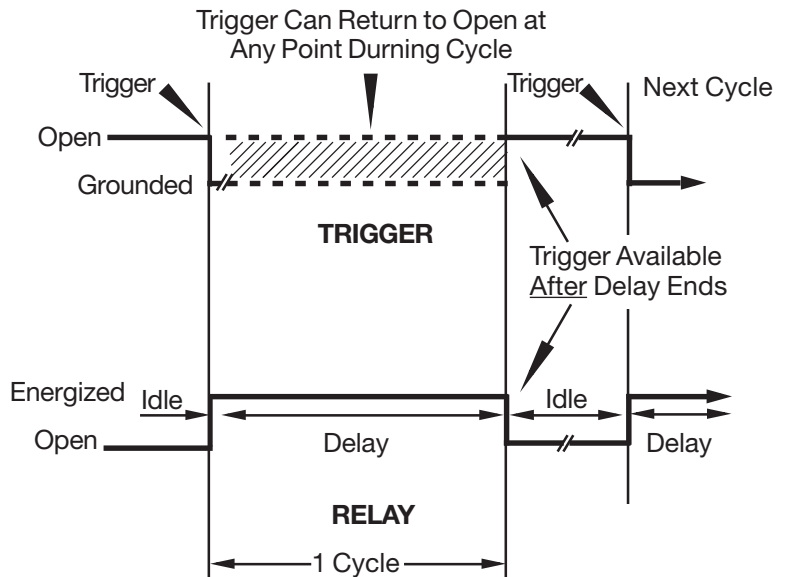

Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM