

37956-RL

12VDC Automotive Adjustable Flasher Module

3 Terminal, Plug-in Relay style adjustable flasher module.

Voltage: 12VDC (11V-15V)

Load: 0.1W (0.02A) Min 150W (20A) Max

Flash Rate: ~60-120/Min

Duty Cycle: 30% to ~70%

Operating Temp: ~-40 to ~+80°C

Connections: 0.25" Blade Terminals

B1+: +12V



L: Load (+12V Out)

-1E: Ground

Socket for Module: ORDER 37957-RL

SQ: 1-1/4" **H:** 1-5/8" (Body) **WT:** .06

ADJUST

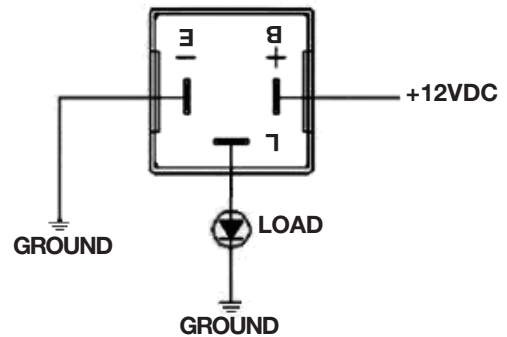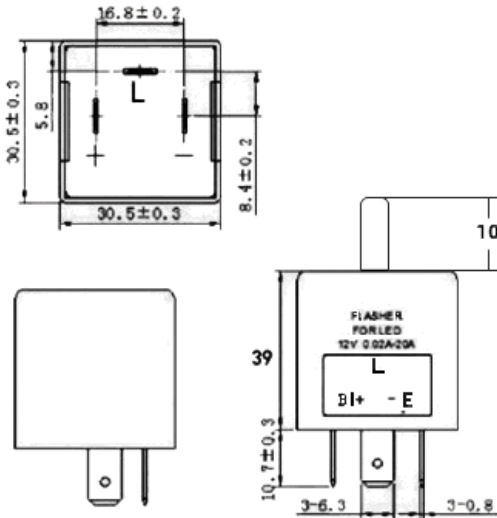

BOTTOM VIEW

All Information including Drawings, Schematics etc, Referenced in this Document is supplied by MPJA inc. as a service to our customers. Accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice

All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM