

• All the data listed in this catalogue are for reference only, TAI-TECH reserves the right to alter or revise the specifications without prior notification.

EMI Suppression Ribbon Cable Cores




SRH Series



Ordering Code

品名編碼

W5 SRH 16x28 x 9 + C B R

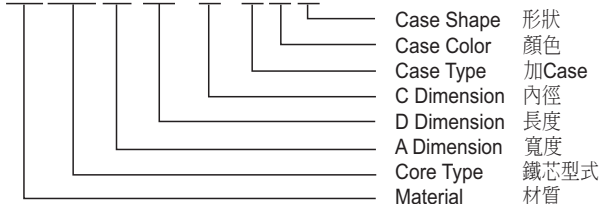

※ Case Color : black 黑 (B), white 白 (W), gray 灰 (G)
 ※ Case Shape : round 圓形 (R), square 方形 (S)

Applications

EMI suppression generated from ribbon cable used in digital equipment.

應用於抑制數位器材中圓形信號線所產生之電波干擾。

Materials

W5




Fig 1




Fig 2




Fig 3

Dimensions & Characteristics

Cores	Dimensions (unit: mm)				Impedance(Ω)		Remark	Fig
	A	B	C	D	25MHz	100MHz		
SRH 8.4 x 15.4 x 3.80	8.40±0.30	4.35±0.30	3.80±0.15	15.40±0.40	80	200	LF-35BR	1
SRH 9.9 x 20.0 x 5.30	9.90±0.30	5.10±0.30	5.30±0.15	20.00±0.50	85	205	LF-50BR	1
SRH 14.4 x 29.2 x 7.60	14.40±0.40	7.70±0.30	7.60±0.20	29.20±0.60	130	240	LF-75GR	1
SRH 15.0 x 28.5 x 6.60	15.00±0.40	7.50±0.30	6.60±0.20	28.50±0.60	125	275	LF-65BS	2
SRH 16.0 x 28.0 x 9.00	16.00±0.40	7.60±0.30	9.00±0.30	28.00±0.60	150	270	LF-80BR	1
SRH 16.4 x 33.3 x 9.30	16.40±0.40	8.30±0.30	9.30±0.20	33.30±0.80	150	270	LF-90BR	1
SRH 18.7 x 30.0 x 10.20	18.70±0.40	9.40±0.30	10.20±0.30	30.00±0.80	130	290	LF-100BS	2
SRH 14.0 x 24.0 x 11.4	14.00±0.40	12.00±0.40	11.40±0.30	24.00±0.60	50	100	TLF-120BR	3
SRH 25.9 x 29.7 x 13.0	25.90±0.70	13.00±0.40	13.00±0.30	29.70±0.60	140	300	LF-130BS	2

Impedance V.S. Frequency Curve for 2UEW0.65⁻ x100m/m

