

19391-OP

MULTI DIGIT DISPLAY




[MFG:] ROHM

[P/N:] LS-2074M2G

Custom display with 7 common Anode, 7 segment Red LED digits and 7 Independent rectangular LEDs.

max reverse Voltage=5VDC, Max forward Current+ 20mA

[W:] 1-7/16" [H:] 13/16" [T:] 1/4" (Body) [WT:] .007

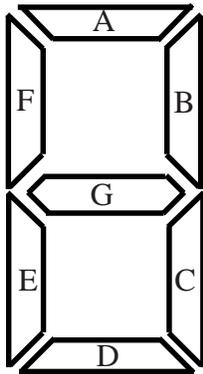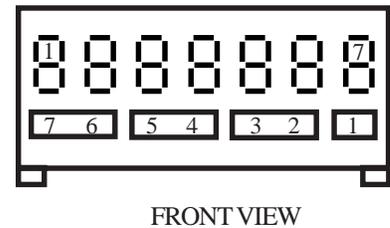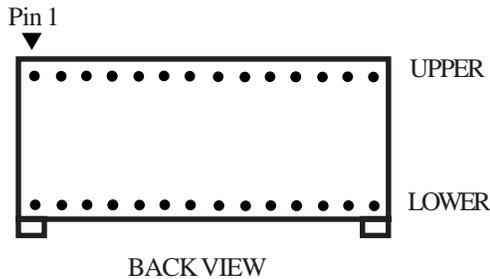

SEGMENT
ASSIGNMENT
FRONT VIEW

Upper Pin	Function	Lower Pin	Function
1:	Segment D	1:	Anode LED 1 Green
2:	Segment E	2:	Cathode LED 1
3:	Digit 7 Cathode	3:	Anode LED 2 Green
4:	Segment F	4:	Cathode LED 2
5:	Digit 6 Cathode	5:	Anode LED 3 Green
6:	Segment B	6:	Cathode LED 3
7:	Digit 5 Cathode	7:	Anode LED 4 Red
8:	Digit 4 Cathode	8:	Cathode LED 4
9:	Digit 3 Cathode	9:	Anode LED 5 Red
10:	Segment A	10:	Cathode LED 5
11:	Digit 2 Cathode	11:	Anode LED 6 Yellow
12:	Segment G	12:	Cathode LED 6
13:	Digit 1 Cathode	13:	Anode LED 7 Yellow
14:	Segment C	14:	Cathode LED 7



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM