

30303-ME

MINI PANEL MOUNT VOLT/AMP METER

Mini snap-in LED panel meter contains both a 3digit Digital Volt Meter and a 3 digit Amp. meter.

Character Height: 0.28in.

Power Supply Voltage: 4.5-30VDC <20mA

Input Range: Self Powered 4.5-30VDC

Resolution: 0.1/0.01V Auto Range


Input Range Amps: 0-10A (9.99)

Resolution: Amps: .01


Accuracy: +-1% +-1LSD

Ammeter Connects in the return side of Load

W: 1-7/8" **H:** 1-1/8" **D:** 1-3/8"(inc. Conn.) **WT:** .06

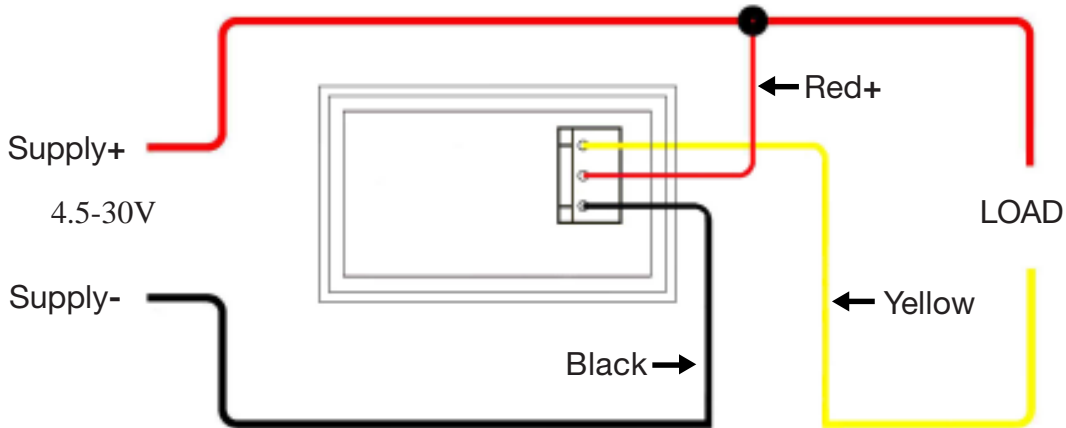

NOTE: Supply lead to & Return Lead from Load to Meter (Yellow) and Meter Common (Black) to Supply should be sized to carry maximum expected Current

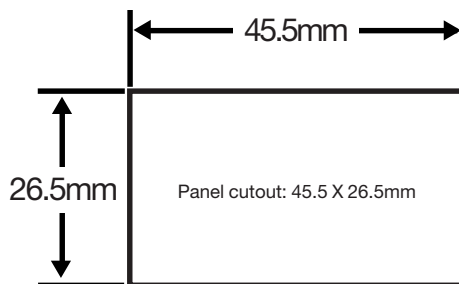

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM