

31036-MS

1.64V 1.8 Degree Stepmotor

MFG: JAPAN SERVO **P/N:** KH56KM2-U117


NEMA: 23

COIL: 1.64V/2A/0.82ohms **TYPE:** 2 Phase Uni-Polar 4 lead

STEP ANGLE: 1.8 deg

Custom motor with a flatted 6.36mm dia. X 7/8" steel shaft. Ball bearings, Removable vibration pad & steel bracket. 6Pin Connector

L: 2-3/16"(Body) **SQ:** 2-3/16" **WT:** 1.7

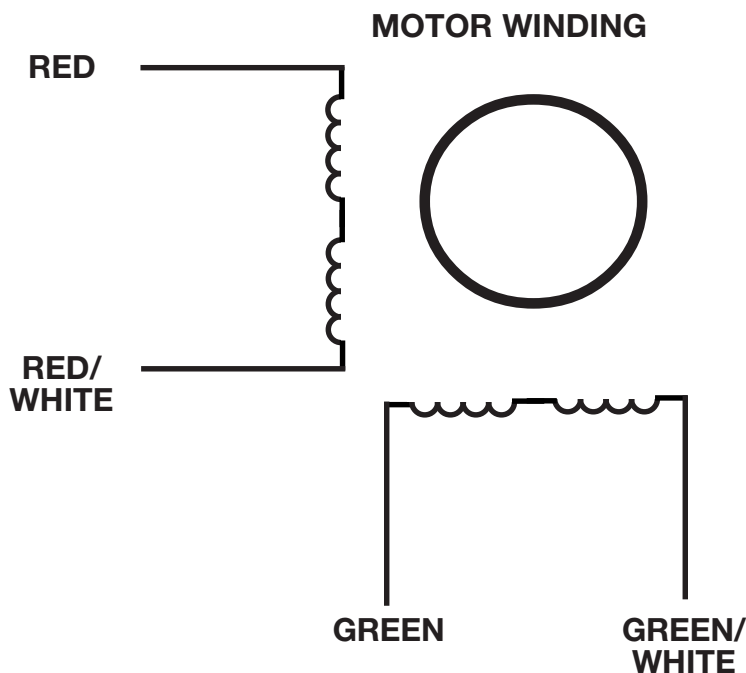

A= RED

\bar{A} = RED/WHITE

B= GREEN

\bar{B} = GREEN/WHITE



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
800-652-6733 FAX 561-844-8764
WWW.MPJA.COM