

32493-MS

NEMA 23 Stepper Motor, 1.8deg. , 9V

MFG: JAPAN SERVO

P/N: KP56KM2-018

NEMA: 23

COIL: 9V/0.6A/15ohm


TYPE: 2 Phase Bi-Polar 4 lead

STEP ANGLE: 1.8 deg

Custom motor with a 1/4" dia. X 3/4" steel shaft. Ball bearings. 6in. leads with 4Pin Connector

L: 2-1/16"(Body) **SQ:** 2-3/16"

WT: 1

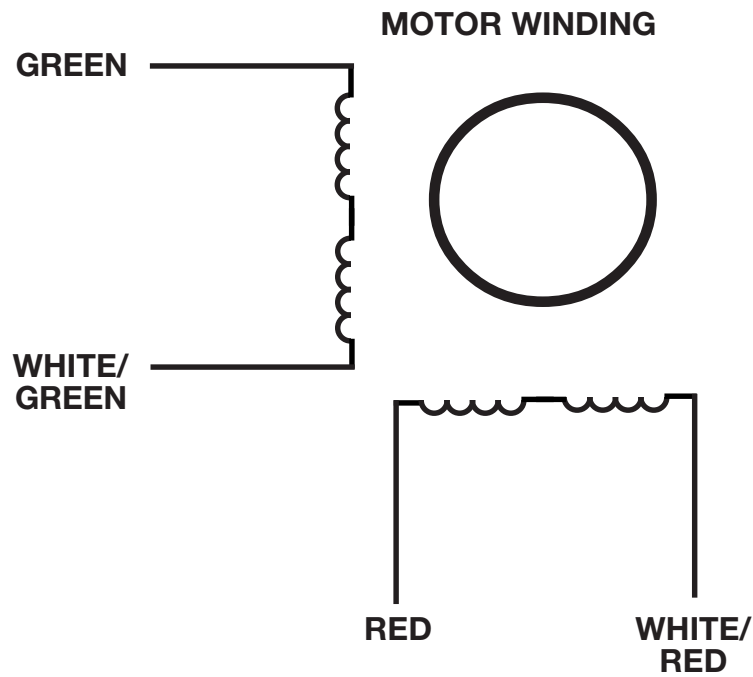

A= GREEN

\bar{A} = WHITE/GREEN

B= RED

\bar{B} = WHITE/RED

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM