

35408-MP

Microwave Motion Detector Module

Microwave motion detector module for lighting control.

Photo cell for Night only use.

Suitable for low voltage incandescent & LED lights

Power: 12VDC

Max Load: 3A (35W Max)

Frequency: ~5.8GHz

Light Sensor: Enable operation <10lux

Field of View: 360deg x 160deg x 6-8m Front of sensor


Fixed Delay on turn Off : 20+-5sec.

Stays triggered on continued motion

3in Leads

CE listed, RoHS compliant

L: 2-1/8" W: 1-1/8" D: 15/16" WT: .05

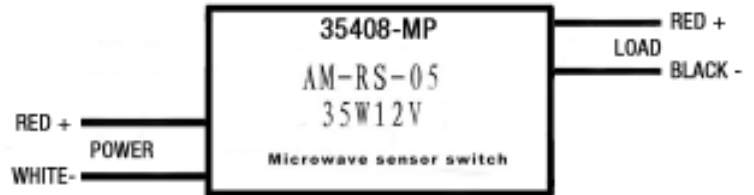

+ Power IN & OUT are Common

NOTES:

Power + IN & OUT (RED Leads) are Internally Connected


Connect Load Between Output RED & BLACK

Low Side switching / Current Sink

To Disable Night Only Operation: Remove Photo cell

To Drive a larger or an Isolated Load:

**Connect a Relay (Coil, With Snubber Diode)
to Output**



Information including Drawings, Schematics, Links and Code (Software) Supplied or Referenced in this Document is supplied by MPJA inc. as a service to our customers and accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice
All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM