

38225-RL


12V, Single Channel, Multifunction, Remote Control Relay

Single Channel wireless remote control relay.
 3 Jumper selectable Modes
 1: Jog: Relay energized (ON) as long as Button Pressed.
 2: Alternate Action: Press ON-Press OFF
 3: Interlocked: Press 1 Button to Energize;(ON) Press
 Other Button to turn OFF

Module Voltage: 12VDC
Idle Current: <10mA
Frequency: 433mH
 Temperature: -20° C+60°
 Receiving Sensitivity: >-105dB
Relay: SPDT
 Contacts: 10A@125/250VAC/30VDC


Module:
 L: 1-3/8" W: 1-3/16" H: 5/8"
Key FOB Remote:
 L: 2-3/8" W: 1-1/8" T: 1/2"
 WT: .15

T: Toggle (Alternate Action)
 L: Interlocked

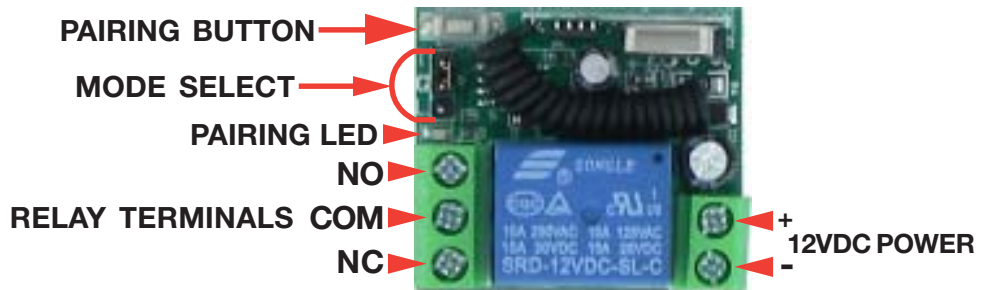

INITIAL MODE SETUP:

- Jog:** Remove Jumper; if present, Press the pairing Button (for about 2 seconds) Red LED will go off. Press Button on Remote within 15sec. The code will be paired within 15 seconds while the red light is off.
- Alternate Action:** Place the Jumper cap on G to L, Press the pairing Button (for about 2 seconds) Red LED will go off. Press Button on Remote within 15sec. The code will be paired within 15 seconds while the red light is off.
- Interlock:** Place the Jumper cap on G to T, Press the pairing Button (for about 2 seconds) Red LED will go off. Press Button on Remote within 15sec. The code will be paired within 15 seconds while the red light is off.
- Code Reset:** Press and Hold the pairing Button for 5 seconds, the LED indicator light flashes 4 times, and the code clearing was successful.

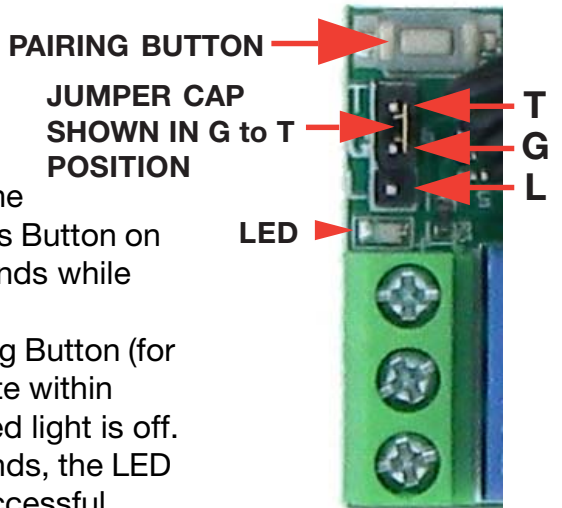

All Information including Drawings, Schematics etc, Referenced in this Document is supplied by MPJA inc. as a service to our customers. Accuracy or usefulness is not guaranteed nor is it an Endorsement of any particular part, supplier or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.

Information Subject to Change Without Notice

All rights are retained by the respective Owners/Author(s)



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403
 800-652-6733 FAX 561-844-8764
 WWW.MPJA.COM