



Part Number: ST-SOLDER-ST0
Description: Lead Free Solder Station
18168-TL

3608



- Power Supply: 115 VAC
- Maximal Power: 60 W
- Temperature Range : 350 °F ~ 895°F / 175 °C ~ 480°C
- Temperature Stability: ±9 °F / ±5 °C
- Length of Power Cord: 79 Inches / 2 Meters
- Length of Soldering Iron Cable: 1 Meter
- Fan/Activated Carbon Filter. Output: 4.5 W
- Exterior Dimension(L x W x H): 14.5 x6.4 x 12.9 (Inches)
368 x 163 x 327(mm)
- Weight (Net): 6.8 Lbs. / 3.1 Kg
- Vertical Swing Adjustment: 15 ° up and 45 ° down
- Height Adjustment: 7" to 10" while the unit's vertical range is at 90 ° from the base of the unit
- RoHS Compliant
- CE Approved




MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, Fl 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM

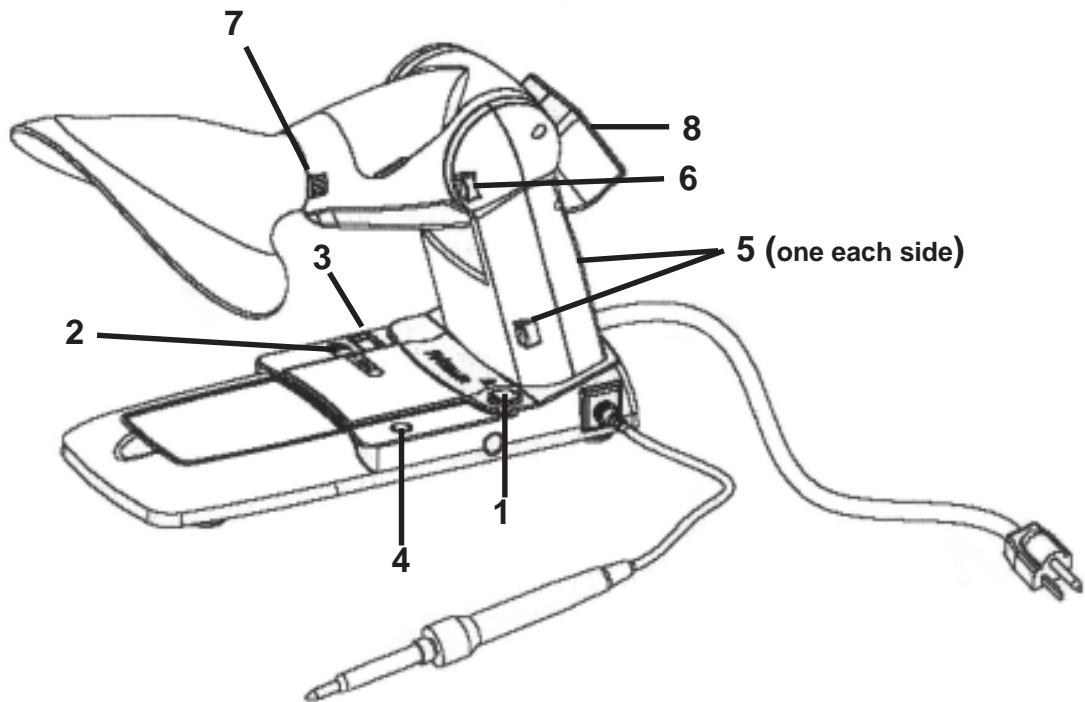

- 1: Power Control:
Illuminated Rocker Switch (1=ON 0=OFF)
- 2: Temperature Control:
Varies Soldering Iron temperature
- 3: Display:
Displays Temperature Control setting in 5 deg. increments.
Slow Flash starting 10 seconds after adjustment: Iron Heating
Fast Flash starting 10 seconds after adjustment: Iron Cooling
Flashing stops when Iron reaches setting
- 4: "Unlocked" Button:
Press and hold; Display shows seconds counting up
Release after "6" turns fan on/off
Release after "9" (Blank Display) changes Display from "F" to "C" or "C" to "F"
- 5: Height Buttons (2) Depress both to adjust Height
- 6: Vertical Swing Button: Depress to adjust Fume hood vertical angle
- 7: Hood Release button: Depress to attach or remove clear "Hood"
- 8: Fan & Activated Carbon Filter



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM