

33955-MI

Mini 5VDC Fluid Pump, 1L/Min

Tiny Submersible Brushless DC impeller pump for lab equipment, sampling inst. etc.
3" leads

DO NOT RUN DRY
NOT SELF PRIMING

MFG: ET Pumps

P/N: Series 23 01-1.0-0.9

Power: 4.5V-12V (5V Nominal); <300mA @ 5VDC; 1-5W

Current: <300mA @ 5VDC

Ideal Fluid: Water 0-100°C

Ambient Temperature: -20-50°C

Duty: Continuous

Output Port: 6.8mm O/D Hose Bib

Input Port: 3/8" O/D

Inlet Tubing If Used: 1/2" OD PVC Clear Tubing with 3/8" ID

Available from your neighborhood Big Box Home Improvement Store

Insulation level: Class B


Max. Head: ~2.0M

Flow Rate (0bar): ~0.6L-2.0L/min

Noise(1M): <40dB

Life: Above 10000 hrs

L: 1-1/2" O/A **W:** 1-3/8" **WT:** .06

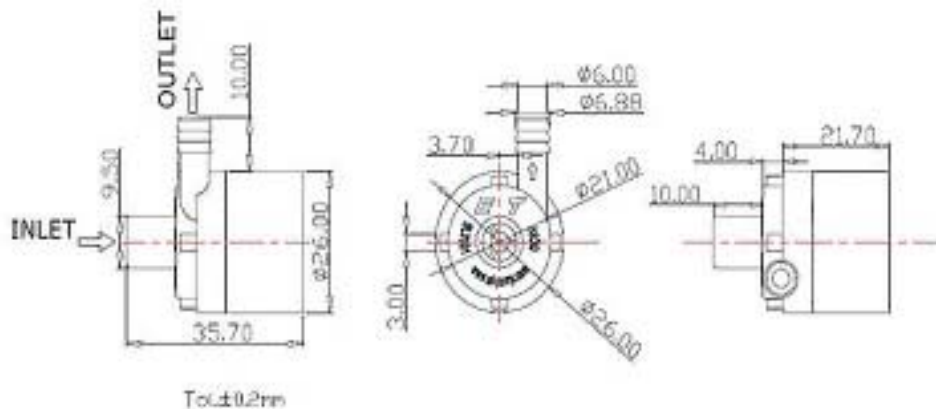

Information obtained from or supplied by Mpja.com or Marlin P. Jones and Associates inc. is supplied as a service to our customers and accuracy is not guaranteed nor is it definitive of any particular part or manufacturer. Use of information and suitability for any application is at users own discretion and user assumes all risk.



MARLIN P. JONES & ASSOC., INC.

P.O. Box 530400 Lake Park, FL 33403

800-652-6733 FAX 561-844-8764

WWW.MPJA.COM